

# KPF12WH

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Chimney
Extraction	Ducted out or re-circulation possible
Material	Stainless Steel + Painted Material
Type of steel	Brushed
EAN code	8017709261672
Hood width	120 cm
Aesthetics	Portofino
Colour	White
Serigraphy colour	Black
Logo	Applied



## Controls

Control setting	Control knobs	Control knobs	Portofino
No. of controls	2	Controls colour	Steel effect

## Program / Functions

No. of speeds	3
Intensive speed	

## Technical Features



No. of lights	4	No. of filters	4
Light type	LED	Anti-grease filters	Stainless steel
Light power	4 W	Vent outlet	150 mm
Light colour	4000 K	Minimum distance from GAS hob	650 mm
temperature scale (K)		Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	815 m <sup>3</sup> /h	Non return valve	Yes
Motor power	275 W		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	287	49
Speed 2	389	58

Speed 3	606	67
Intensive speed	777	73

## Performance / Energy Label


	
<b>Annual Efficiency Consumption (AEChood)</b>	42 kWh/year
<b>Energy efficiency class ( EEC)</b>	A+
<b>Fluid Dynamic Efficiency (FDE)</b>	36.3
<b>Fluid Dynamic Efficiency class (FDEC)</b>	A
<b>Lighting Efficiency (LE)</b>	74.8 lux/W
<b>Lighting Efficiency Class (LEC)</b>	A
<b>Grease Filtering Efficiency (GFE)</b>	74.9 %
<b>Grease Filtering Efficiency Class (GFEC)</b>	D
<b>Air flow at minimum speed (Qmin)</b>	287 m <sup>3</sup> /h
<b>Maximum extraction rate</b>	606 m <sup>3</sup> /h
<b>Intensive extraction rate</b>	777 m <sup>3</sup> /h
	<b>Airbourne acoustical A- weighted sound Power</b>
	Emission at minimum speed (SPEmin)
	Airborne acoustical A- weighted sound Power
	Emission at maximum speed (SPEmax)
	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)
	<b>Time increase factor (F)</b>
	0.7
	<b>Energy Efficiency Index per first cavity</b>
	41.4
	<b>Measured air flow rate at best efficiency point (Qbep)</b>
	400 m <sup>3</sup> /h
	<b>Measured air pressure at best efficiency point (Qbep)</b>
	490 Pa
	<b>Measured electric power input at best efficiency point (Wbep)</b>
	150 W
	<b>Normal Power of the light system (WI)</b>
	4 W
	<b>Average illumination of the light on the cooking surface (Emiddle)</b>
	329 lux
	<b>Sound power level at highest setting (Lwa)</b>
	67 dBA

## Electrical Connection

<b>Nominal power</b>	280 W	<b>Power supply cable length</b>	1000 mm
<b>Voltage</b>	220-240 V		
<b>Frequency (Hz)</b>	50-60 Hz	<b>Plug</b>	No

## Also available

<b>Alternative colours available</b>	Black, Stainless steel, Red, Turquoise	<b>Available colours</b>	KPF12BL/X/RD/T
--------------------------------------	--	--------------------------	----------------

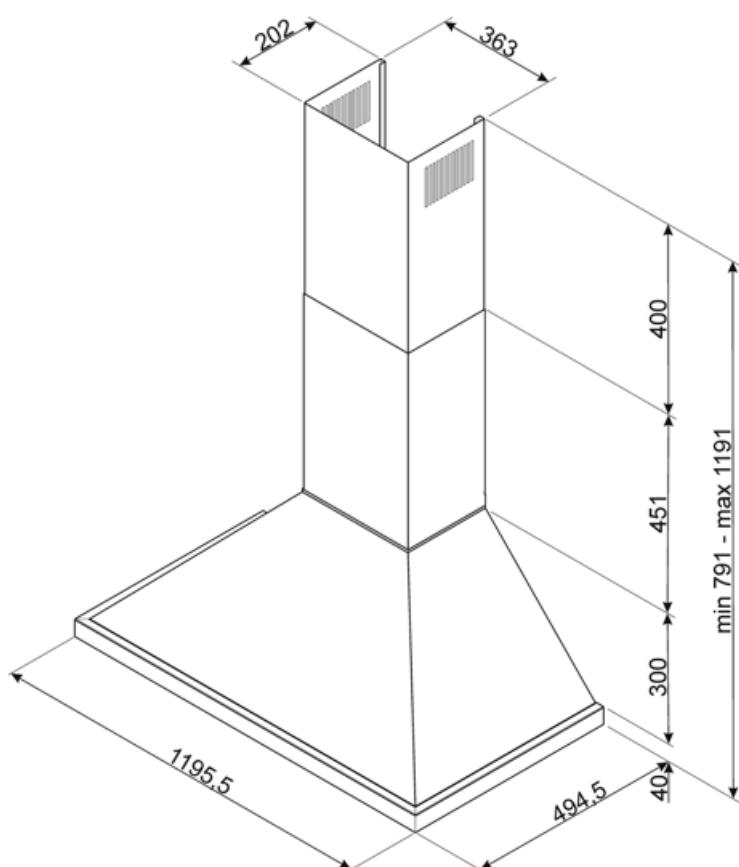

## Compatible Accessories

---

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

 A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.	 Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
 Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.	 Intensive/turbo setting: when extra fast extraction is required.