

KPF94MB

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Stainless Steel + Painted Material
Type of steel	Brushed
EAN code	8017709343644
Hood width	90 cm
Aesthetic	Universale
Colour	Matt Black
Serigraphy colour	Silver
Logo	Applied



Controls



Control setting

Touch control

Program / Functions

No. of speeds

3

Intensive speed



Auto-vent 2.0



V-Condense System



Technical Features



No. of lights

2

No. of filters

3

Light type

LED

Anti-grease filters

Stainless steel

Light Power

2 W

Vent outlet

150 mm

Dimmer mode

Yes

Minimum distance from

750 mm

Light color temperature scale (K)

4000 K
815 m³/h

GAS hob
ELECTRIC hob

650 mm

Free outlet maximum capacity

275 W

Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	288	48
Speed 2	421	63
Speed 3	630	67
Intensive speed	781	72

Performance / Energy Label

	
Annual Efficiency Consumption (AEChood)	40 kWh/a
Energy efficiency class (EEC)	A+
Fluid Dynamic Efficiency (FDE)	36.2
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	78.2 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	78.5 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minimum speed (Qmin)	288 m³/h
Air flow at maximum speed (Qmax)	630 m³/h
Air flow at boost speed (Qboost)	781 m³/h
Airbourne acoustical weighted sound Power Emission at minimum speed (SPEmin)	Airbourne acoustical A- 48 dBA
Airbourne acoustical weighted sound Power Emission at maximum speed (SPEmax)	Airborne acoustical A- 67 dBA
Airbourne acoustical weighted sound power emission at boost speed (SPEboost)	Airbourne acoustical A- 72 dBA
Time increase factor (F)	1.00
Energy Efficiency Index	40.3
Measured air flow rate at best efficiency point (Qbep)	413 m³/h
Measured air pressure at best efficiency point (Pbep)	476 Pa
Measured electric power input at best efficiency point (Wbep)	151 W
Nominal Power consumption of the light system (WL)	2 W
Average illumination of the light on the cooking surface (Emiddle)	172 lux
Sound power level at highest setting (Lwa)	67 dBA

Electrical Connection

Electrical connection rating	277 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		


Also available

Alternative colours available

White, Stainless steel,
Anthracite, Yellow, Green,
Red, Orange

Available colours

KPF9WH-KPF9X-KPF9AN-
KPF9YW-KP9OG-KPF9RD-
KPF9OR

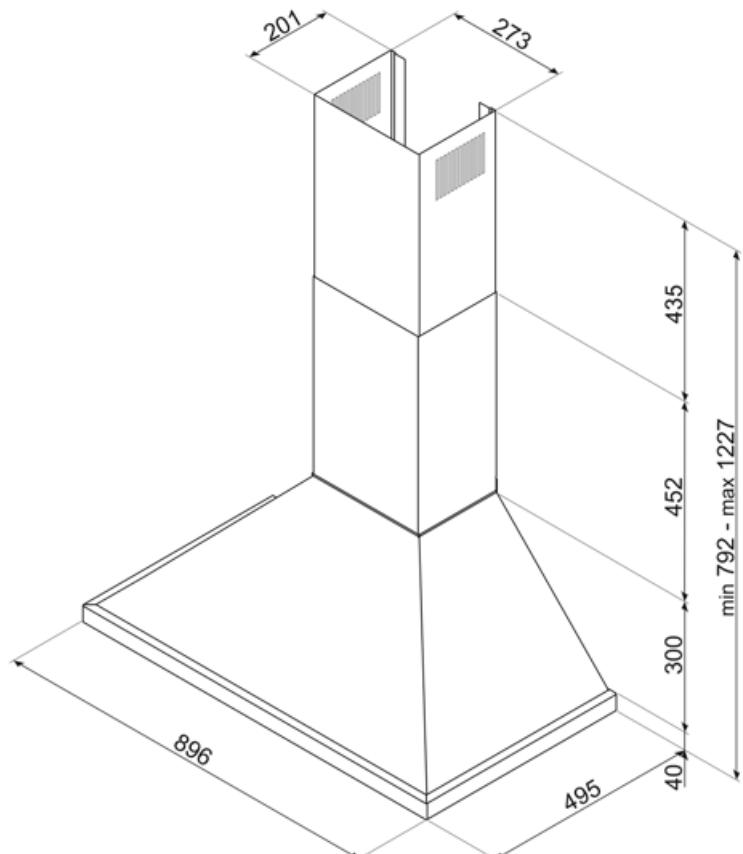

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



Dimmering Lights



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.