

KPF9AN

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Stainless Steel + Painted Material
Type of steel	Brushed
EAN code	8017709236366
Hood width	90 cm



Aesthetics

Aesthetic Colour	Portofino Anthracite	Serigraphy colour Logo	Silver Applied
------------------	----------------------	------------------------	----------------

Controls

Control setting	Control knobs	Control knobs	Portofino
No. of controls	2	Controls colour	Steel effect

Programs / Functions

No. of speeds	3
Intensive speed	

Technical Features

			
No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	815 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dB(A)]
Speed 1	288	48
Speed 2	421	63
Speed 3	630	67
Intensive speed	781	72

Performance / Energy Label

A*

Annual Efficiency Consumption (AEChood) 40 kWh/a
 Energy efficiency class (EEC) A+
 Fluid Dynamic Efficiency (FDE) 36,2
 Fluid Dynamic Efficiency class (FDEC) A
 Lighting Efficiency (LE) 78,2 lux/W
 Lighting Efficiency Class (LEC) A
 Grease Filtering Efficiency (GFE) 78,5 %
 Grease Filtering Efficiency Class (GFEC) C
 Air flow at minumum speed (Qmin) 288 m³/h
 Air flow at maximum speed (Qmax) 630 m³/h
 Air flow at boost speed (Qboost) 781 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 48 dB(A)
 Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 67 dB(A)
 Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 72 dB(A)
 Time increase factor (F) 1,00
 Energy Efficiency Index 40,3
 Measured air flow rate at best efficiency point (Qbep) 413 m³/h
 Measured air pressure at best efficiency point (Pbep) 476 Pa
 Measured electric power input at best efficiency point (Wbep) 151 W
 Nominal Power consumption of the light system (WL) 2 W
 Average illumination of the light on the cooking surface (Emiddle) 172 lux
 Sound power level at highest setting (Lwa) 67 dB(A)

Electrical Connection

Electrical connection rating 277 W
 Voltage 220-240 V

Frequency (Hz) 50-60 Hz
 Power supply cable length 1000 mm


Also available

Alternative colours available

White, Black, Stainless steel, Yellow, Green, Red, Orange

Available colours

KPF9WH-KPF9BL-KPF9X-KP9YW-KPF9OG-KPF9RD-KPF9OR

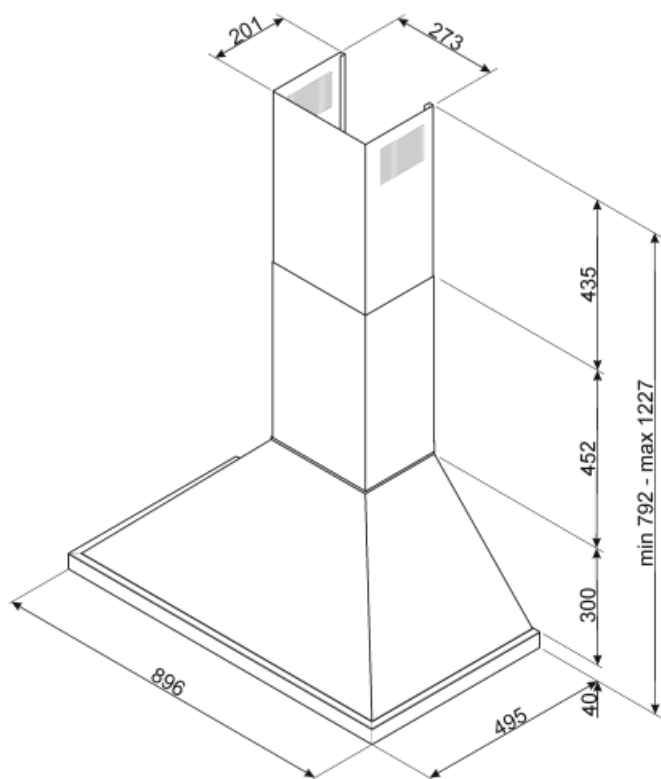

Not included accessories



FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary (TT)



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.