

KPF9OR

Product family Hood

Hood Type Chimney Cooker Hoods

Design Chimney

ExtractionDucted out or re-circulation possibleMaterialStainless Steel + Painted Material

Type of steel Brushed

EAN code 8017709236328

Hood width 90 cm
Aesthetics Portofino
Colour Orange
Serigraphy colour Black
Logo Applied



Controls

Control settingControl knobsControl knobsPortofinoNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed

3 BOOST

Technical Features





No. of lights 2 No. of filters 3

Light typeLEDAnti-grease filtersStainless steelLight power2 WVent outlet150 mmLight colour4000 KMinimum distance from
750 mm

temperature scale (K) GAS hob

Free outlet maximum 815 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	288	48
Speed 2	421	63



Speed 3	630	67
Intensive speed	781	72

Performance / Energy Label

		tr
<	Δ^{-}	Ť

Annual Efficiency 40 kWh/year Airbourne acouistical A- 48 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficiency class (A+ speed (SPEmin) Airborne acoustical A-67 dBA Fluid Dynamic Efficiency 36,2 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 72 dBA Lighting Efficiency (LE) 78,2 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 78.2 % Time increase factor (F) Efficiency (GFE) **Energy Efficiency Index** 40,3 **Grease Filtering** per first cavity Efficiency Class (GFEC) Measured air flow rate 413 m³/h Air flow at minumum 288 m3/h at best efficiency point speed (Qmin) (Qbep) Maximum extraction 630 m³/h Measured air pressure 476 Pa at best efficiency point Intensive extraction rate 781 m³/h (Qbep) Measured electric 151 W power input at best efficiency point (Wbep) Normal Power of the 2 W light system (WI) Average illumination of 172 lux the light on the cooking

Electrical Connection

Nominal power 277 W Frequency (Hz) 50-60 Hz Voltage 220-240 V Power supply cable 1000 mm length

Also available


Alternative colours White, Black, Stainless Available colours KPF9WH-KPF9BL-KPF9X-steel, Anthracite, Yellow, Green, Red KPF9RD

surface (Emiddle) Sound power level at

highest setting (Lwa)

67 dBA



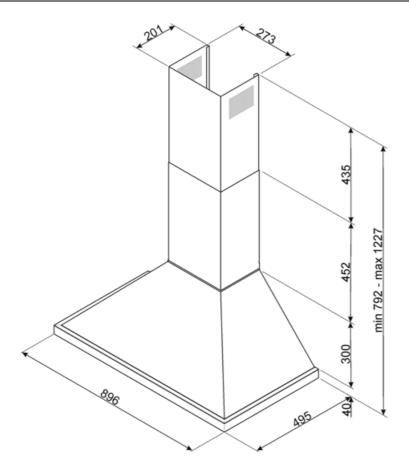



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.