

KPF9OR

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtraction

Material Stainless Steel + Painted Material

Type of steel Brushed

EAN code 8017709236328

Hood width 90 cm
Aesthetic Portofino
Colour Orange
Serigraphy colour Black
Logo Applied



Controls

Control settingControl knobsControl knobsPortofinoNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed

3 800ST

Technical Features





Free outlet maximum

No. of lights 2 No. of filters 3

Light typeLEDAnti-grease filtersStainless steelLight Power2 WVent outlet150 mmLight color temperature4000 KMinimum distance from750 mm

scale (K) GAS hob

815 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	288	48
Speed 2	421	63



Speed 3	630	67
Intensive speed	781	72

Performance / Energy Label

	. A
< /	Ť
	D

Annual Efficiency 40 kWh/a Airbourne acouistical A- 48 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A+ speed (SPEmin) (EEC) Airborne acoustical A-67 dBA Fluid Dynamic Efficiency 36,2 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 72 dBA Lighting Efficiency (LE) 78,2 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 78.2 % Time increase factor (F) 1,00 Efficiency (GFE) 40,3 **Energy Efficiency Index Grease Filtering** Measured air flow rate 413 m³/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 288 m³/h (Qbep) speed (Qmin) Measured air pressure 476 Pa Air flow at maximum 630 m³/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 781 m³/h Measured electric 151 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 172 lux the light on the cooking

Electrical Connection

Electrical connection

rating

220-240 V Voltage Frequency (Hz) 50-60 Hz

Power supply cable

surface (Emiddle) Sound power level at

highest setting (Lwa)

length

Plug

1000 mm

67 dBA

Not present

Also available

Alternative colours available

White, Black, Stainless steel, Anthracite, Yellow,

Green, Red


277 W

Available colours

KPF9WH-KPF9BL-KPF9X-KPF9AN-KPF9YW-KP9OG-

KPF9RD



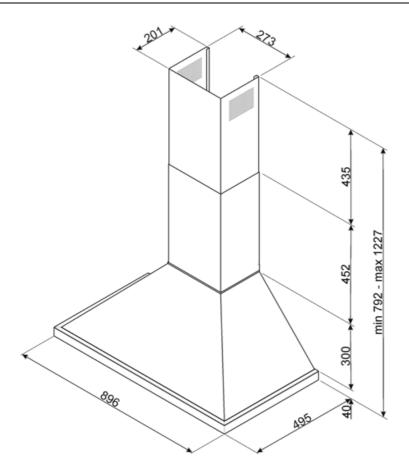



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.