

KPF9WH

Product family Hood

Hood Type Chimney Cooker Hoods

Design Chimney

ExtractionDucted out or re-circulation possibleMaterialStainless Steel + Painted Material

Type of steel Brushed

EAN code 8017709236359

Hood width 90 cm
Aesthetics Portofino
Colour White
Serigraphy colour Black
Logo Applied



Controls

Control settingControl knobsControl knobsPortofinoNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed

3 800ST

Technical Features

Free outlet maximum





No. of lights 2 No. of filters 3

Light typeLEDAnti-grease filtersStainless steelLight power2 WVent outlet150 mmLight colour4000 KMinimum distance from
750 mm

temperature scale (K) GAS hob

815 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	288	48
Speed 2	421	63



Speed 3	630	67
Intensive speed	781	72

Performance / Energy Label

	. A
< /	Ť
	D

Annual Efficiency 40 kWh/year Airbourne acouistical A- 48 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficiency class (A+ speed (SPEmin) EEC) Airborne acoustical A-Fluid Dynamic Efficiency 36,2 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 72 dBA Lighting Efficiency (LE) 78,2 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 78.5 % Time increase factor (F) Efficiency (GFE) **Energy Efficiency Index Grease Filtering** per first cavity Efficiency Class (GFEC) Measured air flow rate Air flow at minumum 288 m³/h at best efficiency point speed (Qmin) (Qbep) Maximum extraction 630 m³/h Measured air pressure at best efficiency point Intensive extraction rate 781 m³/h (Qbep) Measured electric power input at best Normal Power of the

151 W efficiency point (Wbep) 2 W light system (WI) Average illumination of 172 lux the light on the cooking surface (Emiddle) Sound power level at 67 dBA highest setting (Lwa)

67 dBA

40,3

413 m³/h

476 Pa


Electrical Connection

Nominal power 277 W Frequency (Hz) 50-60 Hz Voltage 220-240 V 1000 mm Power supply cable length

Also available

Alternative colours Available colours Black, Stainless steel, KPF9BL-KPF9X-KPF9ANavailible Anthracite, Yellow, Green, KP9YW-KPF9OG-KPF9RD-KPF9OR Red, Orange



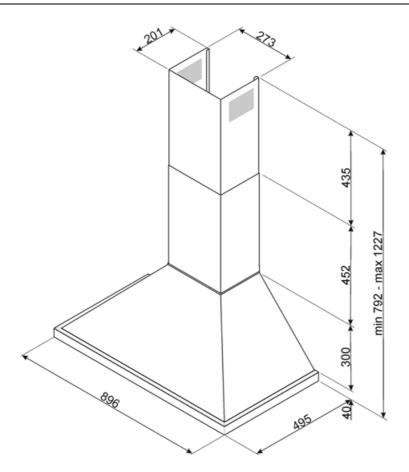



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.