


KPF9X

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709236373
Hood width	90 cm

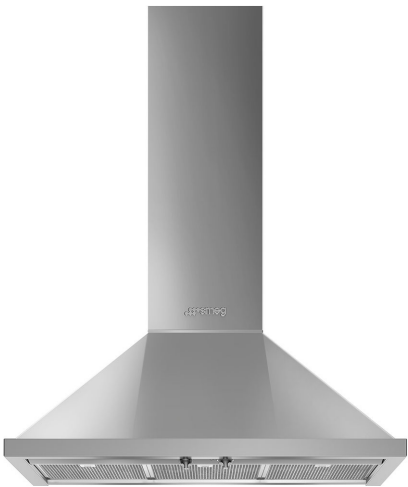

Aesthetics

Aesthetic	Portofino	Serigraphy colour	Black
Colour	Stainless steel	Logo	Applied
Finishing	Satin		

Controls

Control setting	Control knobs	Control knobs	Portofino
No. of controls	2	Controls colour	Steel effect

Programs / Functions

No. of speeds	3
Intensive speed	

Technical Features

		No. of lights	2	No. of filters	3
		Light type	LED	Anti-grease filters	Stainless steel
		Light Power	2 W	Vent outlet	150 mm
		Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm
		Free outlet maximum capacity	815 m³/h	Minimum distance from ELECTRIC hob	650 mm
		Motor power	275 W		

Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dB(A)]
Speed 1	288	48
Speed 2	421	63
Speed 3	630	67
Intensive speed	781	72

Performance / Energy Label

A+

Annual Efficiency Consumption (AEChood) 40 kWh/a
Energy efficiency class (EEC) A+
Fluid Dynamic Efficiency (FDE) 36,2
Fluid Dynamic Efficiency class (FDEC) A
Lighting Efficiency (LE) 78,2 lux/W
Lighting Efficiency Class (LEC) A
Grease Filtering Efficiency (GFE) 78,5 %
Grease Filtering Efficiency Class (GFEC) C
Air flow at minumum speed (Qmin) 288 m³/h
Air flow at maximum speed (Qmax) 630 m³/h
Air flow at boost speed (Qboost) 781 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 48 dB(A)
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 67 dB(A)
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 72 dB(A)
Time increase factor (F) 1,00
Energy Efficiency Index 40,3
Measured air flow rate at best efficiency point (Qbep) 413 m³/h
Measured air pressure at best efficiency point (Pbep) 476 Pa
Measured electric power input at best efficiency point (Wbep) 151 W
Nominal Power consumption of the light system (WL) 2 W
Average illumination of the light on the cooking surface (Emiddle) 172 lux
Sound power level at highest setting (Lwa) 67 dB(A)

Electrical Connection

Electrical connection rating 277 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1000 mm


Also available

Alternative colours available

White, Black, Anthracite,
Yellow, Green, Red, Orange

Available colours

KPF9WH-KPF9BL-
KPF9AN-KP9YW-KPF9OG-
KPF9RD-KPF9OR

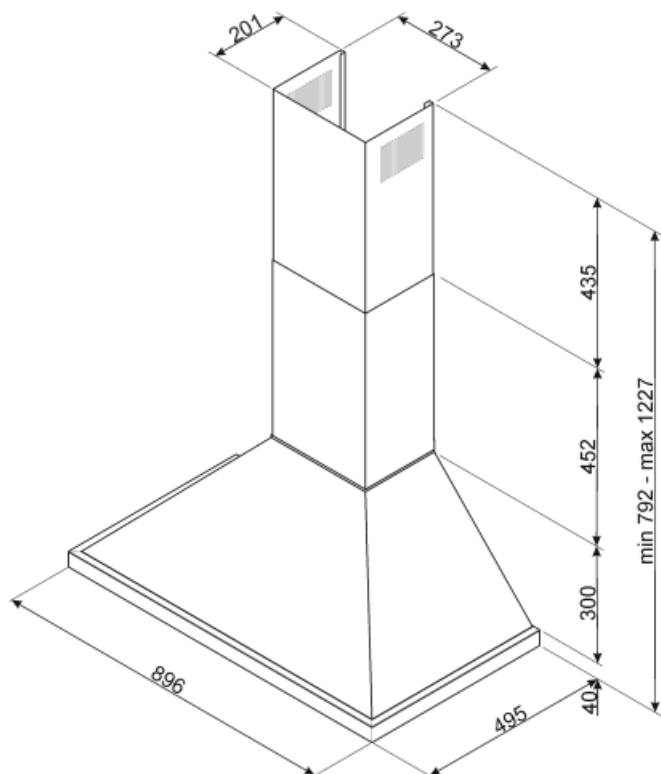

Not included accessories



FLT6





Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary (TT)

	A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Intensive/turbo setting: when extra fast extraction is required.