

# KPF9X

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709236373
Hood width	90 cm



## Aesthetics

Aesthetic	Portofino	Serigraphy colour	Black
Colour	Stainless steel	Logo	Applied
Finishing	Satin		



## Controls

Control setting	Control knobs	Control knobs	Portofino
No. of controls	2	Controls colour	Steel effect

## Programme / Functions

No. of speeds	3
Intensive speed	

## Technical Features

			
No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	815 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W		

Non return valve

Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	288	48
Speed 2	421	63
Speed 3	630	67
Intensive speed	781	72

## Performance / Energy Label

A+

Annual Efficiency Consumption (AEC <sub>hood</sub> )	40 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPE <sub>min</sub> )	48 dB(A)
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE <sub>max</sub> )	67 dB(A)
Fluid Dynamic Efficiency (FDE)	36.2	Airbourne acoustical A-weighted sound power emission at boost speed (SPE <sub>boost</sub> )	72 dB(A)
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1.00
Lighting Efficiency (LE)	78.2 lux/W	Energy Efficiency Index	40.3
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Q <sub>bep</sub> )	413 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	78.5 %	Measured air pressure at best efficiency point (P <sub>bep</sub> )	476 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (W <sub>bep</sub> )	151 W
Air flow at minumum speed (Q <sub>min</sub> )	288 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Q <sub>max</sub> )	630 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (E <sub>middle</sub> )	172 lux
Air flow at boost speed (Q <sub>boost</sub> )	781 m <sup>3</sup> /h	Sound power level at highest setting (L <sub>wa</sub> )	67 dB(A)

## Electrical Connection

Electrical connection rating	277 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm


## Also available

**Alternative colours available**

White, Black, Anthracite,  
Yellow, Green, Red, Orange

**Available colours**

KPF9WH-KPF9BL-  
KPF9AN-KP9YW-KPF9OG-  
KPF9RD-KPF9OR

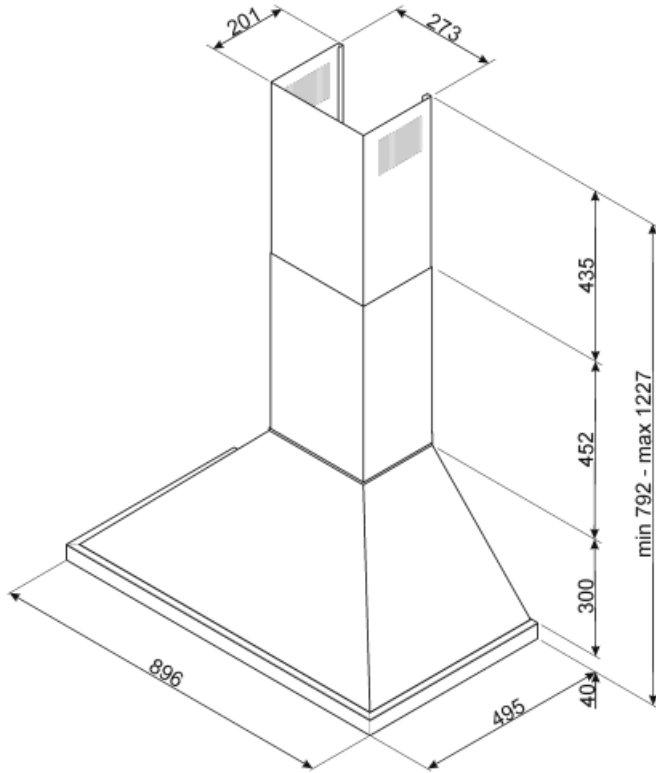

## Not included accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary (TT)

---



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.