

KPFA12X

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtraction

Material Stainless Steel + Painted Material

Type of steel Brushed

EAN code 8017709293505

Aesthetic Portofino
Colour Stainless steel

Serigraphy colour Black Logo Applied



650 mm

Controls

Control settingControl knobsControl knobsPortofinoNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds
Intensive speed

Technical Features



Motor power

No. of lights 4 No. of filters 4

Light typeLEDAnti-grease filtersStainless steelLight Power4 WVent outlet150 mmLight color temperature4000 °KMinimum distance from650 mm

scale (°K) GAS hob

275 W

Light color temperature 3000° - 5700° °K Minimum distance from

range ELECTRIC hob

Free outlet maximum 815 m³/h Non return valve Yes

capacity

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704- 2-13 [dBA] |
|---------|-------------------------------------|--------------------------------------|
| Speed 1 | 287 | 49 |



| Speed 2 | 389 | 58 |
|-----------------|-----|----|
| Speed 3 | 606 | 67 |
| Intensive speed | 777 | 73 |

Performance / Energy Label

| _/ | | A''' |
|----|----|------|
| | Δ. | Ť |
| | | D |

Annual Efficiency Airbourne acoustical A- 73 dBA 42 kWh/a weighted sound power Consumption (AEChood) emission at boost speed Energy efficieency class A+ (SPEboost) (EEC) Time increase factor (F) 0,7 Fluid Dynamic Efficiency 36,3 (FDE) **Energy Efficiency Index** Lighting Efficiency (LE) 74,8 lux/W Measured air flow rate 400 m³/h at best efficiency point Grease Filterina 74.9 % (Qbep) Efficiency (GFE) Measured air pressure 490 Pa Air flow at minumum 287 m³/h at best efficiency point speed (Qmin) (Pbep) Air flow at maximum 606 m³/h Measured electric 150 W speed (Qmax) power input at best Air flow at boost speed 777 m³/h efficiency point (Wbep) (Qboost) **Nominal Power** 4 W Airbourne acouistical A- 49 dBA consumption of the light weighted sound Power system (WL) **Emission at minimum** Average illumination of 329 lux speed (SPEmin) the light on the cooking Airborne acoustical A-67 dBA surface (Emiddle) weighted sound Power Sound power level at 67 dBA **Emission at maximum** highest setting (Lwa) speed (SPEmax)


Electrical Connection

Voltage 220-240 V Power supply cable 1000 mm Frequency (Hz) 50-60 Hz length

Also available

Alternative colours White, Black, Red, Available colours KPF12WH/BL/X/RD/T availible Turquese



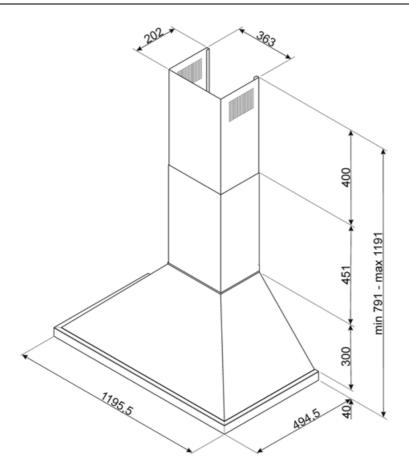



Symbols glossary



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



•••