

# KPFA9BL

|                |                                    |
|----------------|------------------------------------|
| Product family | Hood                               |
| Hood Type      | Decorative wall hood               |
| Design         | Chimney                            |
| Extraction     | Extraction                         |
| Material       | Stainless Steel + Painted Material |
| Type of steel  | Brushed                            |
| EAN code       | 8017709251499                      |
| Hood width     | 90 cm                              |



## Aesthetics

|                  |                 |                        |                |
|------------------|-----------------|------------------------|----------------|
| Aesthetic Colour | Portofino Black | Serigraphy colour Logo | Silver Applied |
|------------------|-----------------|------------------------|----------------|



## Controls

|                 |               |                 |              |
|-----------------|---------------|-----------------|--------------|
| Control setting | Control knobs | Control knobs   | Portofino    |
| No. of controls | 2             | Controls colour | Steel effect |

## Programs / Functions

|                 |   |
|-----------------|---|
| No. of speeds   | 3   |
| Intensive speed |  |

## Technical Features

|  |   |                                    |                 |
|--|---|------------------------------------|-----------------|
|  |  |                                    |                 |
| No. of lights  | 2   | No. of filters                     | 3               |
| Light type   | LED   | Anti-grease filters                | Stainless steel |
| Light Power  | 2 W   | Vent outlet                        | 150 mm          |
| Light color temperature scale (°K)   | 4000 °K   | Minimum distance from GAS hob      | 750 mm          |
| Free outlet maximum capacity   | 815 m³/h  | Minimum distance from ELECTRIC hob | 650 mm          |
| Motor power  | 275 W   | Non return valve                   | Yes             |


|                    | Extraction rate IEC<br>61591 [m³/h] | Noise level IEC 60704-2-<br>13 [dB(A)] |
|--------------------|-------------------------------------|--|
| Speed 1            | 288                                 | 48                                     |
| Speed 2            | 421                                 | 63                                     |
| Speed 3            | 630                                 | 67                                     |
| Intensive<br>speed | 781                                 | 72                                     |

## Electrical Connection

|                                 |           |                              |          |
|---------------------------------|-----------|------------------------------|----------|
| Electrical connection<br>rating | 279 W     | Frequency (Hz)               | 50-60 Hz |
| Voltage                         | 220-240 V | Power supply cable<br>length | 1000 mm  |

## Also available

|                                  |  |                   |                              |
|----------------------------------|--|-------------------|------------------------------|
| Alternative colours<br>available | White, Stainless steel,<br>Anthracite, Yellow, Green,<br>Red, Orange | Available colours | KPFA9WH-X-AN-YW-OG-<br>RD-OR |
|----------------------------------|--|-------------------|------------------------------|

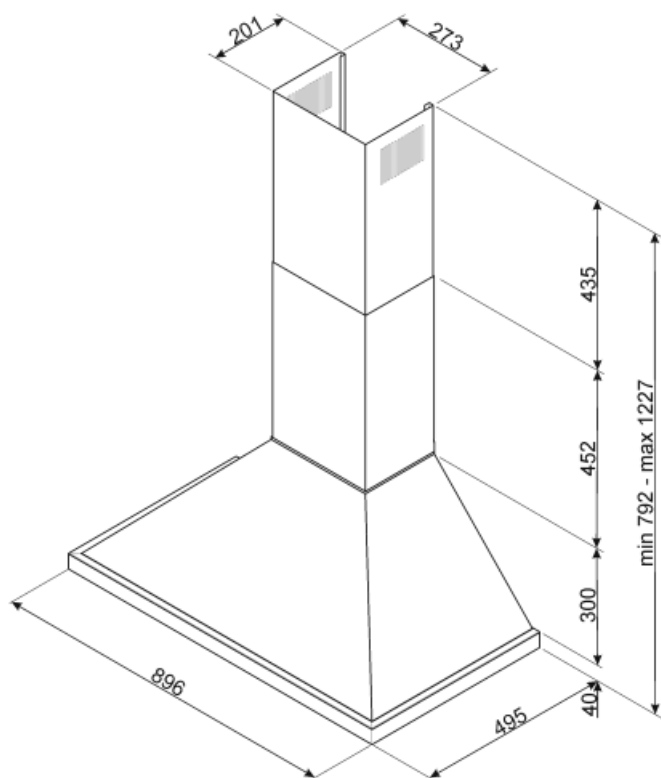

---

## Not included accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary (TT)

---



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.