

KPRU30X

Product family	Hood
Hood Type	Integrated (semi) hood
Design	Canopy pro-style
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709338565
Hood width	30 "
Aesthetic	Classica
Colour	Stainless steel
Finishing	Satin
Logo	Embossed



Controls



Control setting

Touch control

Program / Functions

No. of speeds

4

Intensive speed



24h air filter function



Auto-vent 2.0



Technical Features



No. of lights

2

No. of filters

2

Light type

LED

Anti-grease filters

Stainless steel

Light Power

1.3 W

Filter replacement

Yes

Dimmer mode

Yes

indicator

Light color temperature scale (K)

3000 K

Vent outlet

5 7/8 "

Free outlet maximum capacity

599 CFM

Minimum distance from GAS hob

750 "

Motor power

350 W

Minimum distance from ELECTRIC hob

650 "

Non return valve



Yes

	Extraction rate IEC 61591 [CFM]	Noise level IEC 60704-2-13 [dBA]
Speed 1	213	54
Speed 2	325.5	63
Speed 3	454	70
Intensive speed	590.5	76

Electrical Connection

Electrical connection rating 353 W
Voltage 120 V
Frequency (Hz) 60 Hz

Power supply cable length 1000 "
Plug No

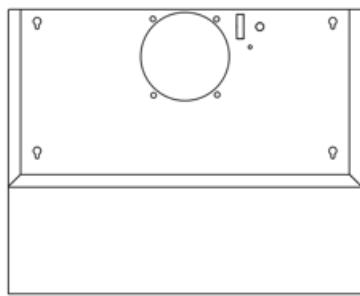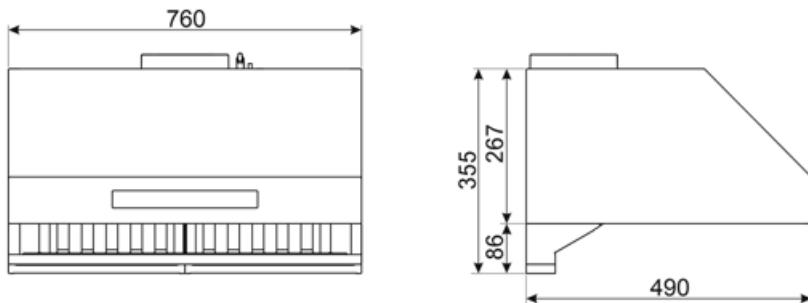



Compatible Accessories

FLT6U



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Warning light(s): to advise when filters need changing.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Dimmering Lights



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.