KPRU30X

Product family	Hood
Hood Type	Integrated (semi) hood
Design	Canopy pro-style
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709338565
Hood width	30 "
Aesthetic	Classica
Colour	Stainless steel
Finishing	Satin
Logo	Embossed



Controls

Control setting	Touch control

Program / Functions

No. of speeds	4
Intensive speed	BOOST
24h air filter function	24 hours
Auto-vent 2.0	


Technical Features


No. of lights	2	**No. of filters**	2
Light type	LED	**Anti-grease filters**	Stainless steel
Light Power	1,3 W	**Filter replacement indicator**	Yes
Dimmer mode	Yes	**Vent outlet**	5 7/8 "
Light color temperature scale (K)	3000 K	**Minimum distance from GAS hob**	750 "
Free outlet maximum capacity	599 CFM	**Minimum distance from ELECTRIC hob**	650 "
Motor power	350 W	**Non return valve**	Yes


	Extraction rate IEC 61591 [CFM]	Noise level IEC 60704-2-13 [dBA]
Speed 1	213	54
Speed 2	325.5	63
Speed 3	454	70
Intensive speed	590.5	76

Electrical Connection

Electrical connection rating	353 W	**Power supply cable length**	1000 "
Voltage	120 V	**Plug**	No
Frequency (Hz)	60 Hz		

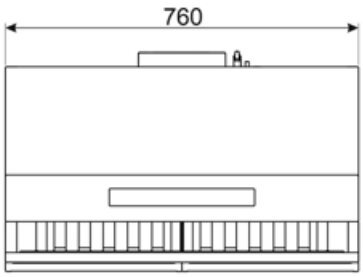

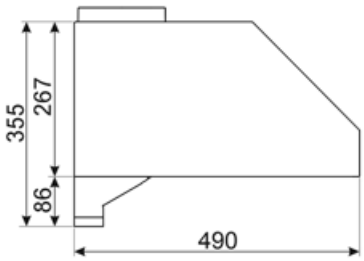

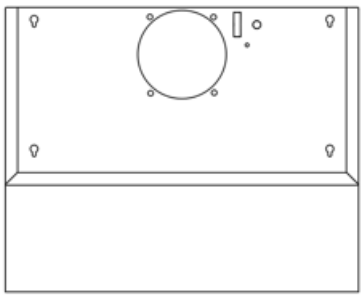

Compatible Accessories

FLT6U



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Warning light(s): to advise when filters need changing.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Dimmering Lights



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.