KPRU30X

Product family	Hood
Hood Type	Under cabinet
Design	Canopy pro-style
Venting type	Vented
Electronic control	Yes
Material	Stainless steel
Stainless steel type	Brushed
EAN code	8017709338565
Hood width	30 "
Aesthetics	Classic
Color	Stainless steel
Finishing	Satin
Logo	Embossed



Controls

Control setting	Touch controls

Program / Functions

Speed levels	4
Intensive speed	BOOST
24h air replacement function	24 hours
Auto-vent 2.0	

Technical Features


No. of lights	2
Lighting	LED
Light power	1,3 W
Dimmable light	Yes
Light color temperature scale (K)	3000 K
Maximum extraction capacity at free mode	599 CFM
Motor power	350 W

No. of filters	2
Anti-grease filters	Stainless steel
Filter replacement indicator	Yes
Vent outlet	5 7/8 "
Minimum distance from gas cooktop	750 "
Minimum distance from electric cooktop	650 "
Non-return valve	Yes

	Extraction rate [CFM]	Noise level [dBA]
Speed level 1	213	54
Speed 2	325.5	63
Speed 3	454	70
Intensive speed	590.5	76

Electrical Connection

Electrical connection rating	353 W	**Power supply cable length**	1000 "
Voltage	120 V	**Plug**	No
Frequency (Hz)	60 Hz		

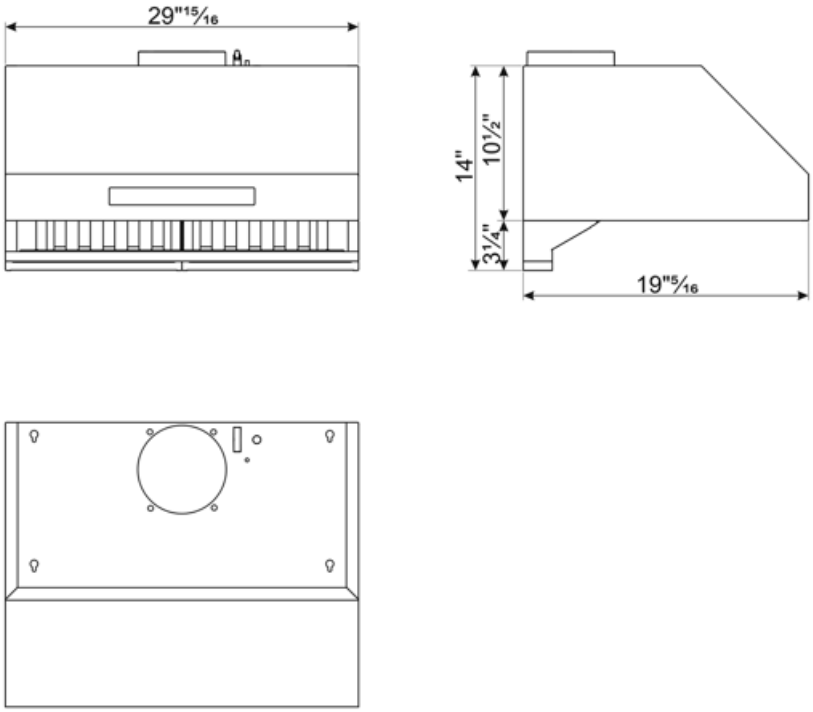

Compatible Accessories

FLT6U



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Warning light(s): to advise when filters need changing.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Dimmering Lights



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.