

KR37XE

Product family	Hood
Hood Type	Decorative wall hood
Design	Cylindric
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709203238
Hood width	37 cm



Aesthetics

Aesthetic Colour	Universale Stainless steel	Finishing Logo	Satin Embossed
------------------	-------------------------------	----------------	-------------------

Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

Technical Features



No. of lights	2	Motor power	270 W
Light type	LED	No. of filters	1
Light Power	1 W	Anti-grease filters	Aluminium
Dimmer mode	Yes	Filter replacement indicator	Yes
Free outlet maximum capacity	690 m ³ /h	Vent outlet	150 mm

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	280	53
Speed 2	400	60
Speed 3	550	67
Intensive speed	660	70

Accessories Included

Tube reduction Yes

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	58 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	53 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	28	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Power Consumption in Off mode (Po)	0,49 W
Lighting Efficiency (LE)	123 lux/W	Time increase factor (F)	1,00
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	332 m ³ /h
Grease Filtering Efficiency (GFE)	87 %	Measured air pressure at best efficiency point (Pbep)	465 Pa
Grease Filtering Efficiency Class (GFEC)	B	Measured electric power input at best efficiency point (Wbep)	153 W
Air flow at minumum speed (Qmin)	280 m ³ /h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	550 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	270 lux
Air flow at boost speed (Qboost)	660 m ³ /h	Sound power level at highest setting (Lwa)	67 dBA

Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	272 W	Power supply cable length	1500 mm
Voltage	220-240 V		

Optional accessories

Charcoal filter KITFC161

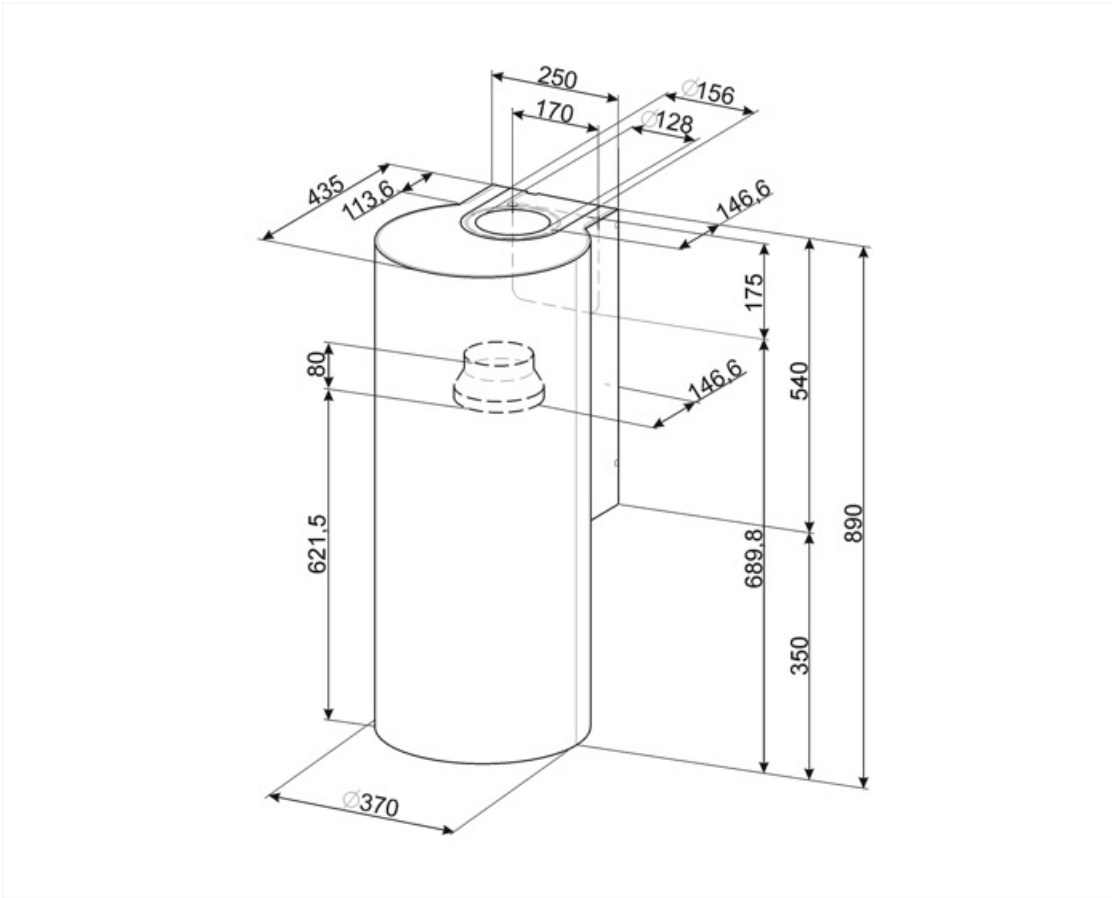

Not included accessories



KITALLFC







Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



RCKF2

Remote control

Symbols glossary (TT)

- | | | | |
|--|---|---|--|
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |  | Warning light(s): to advise when filters need changing. |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |  | Intensive/turbo setting: when extra fast extraction is required. |
|  | Dimmering Lights |  | |