

KR37XE

Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	Cylindric
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709203238
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Logotipo	Logotipo embutido



Controls

Control setting	Electronic buttons	Display	No
Led color	White		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	No
Other options	No

Technical Features



Hood without motor	No	Motor power	270 W
Remote motor	No	No. of filters	1
No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Charcoal filters included	No
Light Power	1 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Free outlet maximum capacity	690 m³/h	Non return valve	No

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	280	53
Speed 2	400	60
Speed 3	550	67
Intensive speed	660	70

Accessories Included

Remote control	No	Tube reduction	Yes
----------------	----	----------------	-----

Performance / Energy Label



Consumo anual de energía (CAE exaustor)	58 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	53 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	28	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1,00
Lighting Efficiency (LE)	123 lux/W	Measured air flow rate at best efficiency point (Qbep)	332 m³/h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Pbep)	465 Pa
Grease Filtering Efficiency (GFE)	87 %	Measured electric power input at best efficiency point (Wbep)	153 W
Grease Filtering Efficiency Class (GFEC)	B	Nominal Power consumption of the light system (WL)	2 W
Air flow at mininum speed (Qmin)	280 m³/h	Average illumination of the light on the cooking surface (Emiddle)	270 lux
Air flow at maximum speed (Qmax)	550 m³/h	Sound power level at highest setting (Lwa)	67 dBA
Air flow at boost speed (Qboost)	660 m³/h		

Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
------	----	----------------	----------


Electrical connection rating	272 W
Voltage	220-240 V

Comprimento do cabo de alimentação	1500 mm
------------------------------------	---------

Optional accessories

Charcoal filter	KITFC161
Remote control	No
Chimney extension	No
Vent outlet	No

Non return valve	No
Kit with aesthetic components	No
Diffuser kit	No

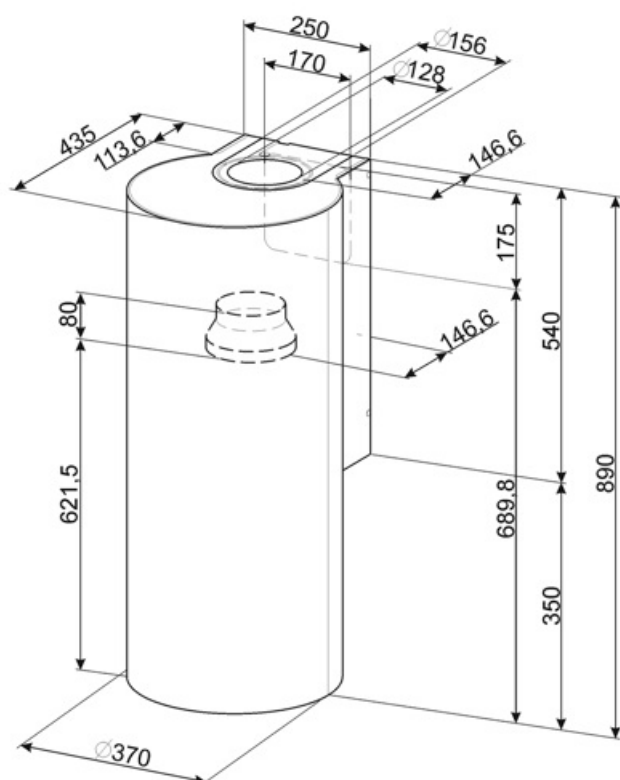

Compatible Accessories



KITFC161

Kit de filtros de carvão 2 peças



RCKF2

Comando à distância

Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.



Luzes de escurecimento