

# KS110BLE

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Painted material
Type of steel	Brushed
EAN code	8017709201845
Aesthetics	Universal
Colour	Black
Logo	Embossed





## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features

				
No. of lights	2		Anti-grease filters	Aluminium
Light type	LED		Filter replacement indicator	Yes
Light power	1 W		Vent outlet	150 mm
Light colour	4000 °K		Minimum distance from GAS hob	750 mm
temperature scale (°K)			Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	800 m³/h		Non return valve	Yes
Motor power	275 W			
No. of filters	3			

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	295	51

Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

## Performance / Energy Label



Annual Efficiency Consumption (AEC) 62 KWh/year

Energy efficiency class (EEC) B

Fluid Dynamic Efficiency (FDE) 27,9

Fluid Dynamic Efficiency class (FDEC) B

Lighting Efficiency (LE) 84,1 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 78,7 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at minimum speed (Qmin) 295 m³/h

Maximum extraction rate 513 m³/h

Intensive extraction rate 702 m³/h

Airborne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 51 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 64 dBA

Airborne acoustical A-weighted sound power emission at boost speed (SPEboost) 72 dBA

Time increase factor (F) 1,00

Energy Efficiency Index per first cavity 58,2

Measured air flow rate at best efficiency point (Qbep) 373 m³/h

Measured air pressure at best efficiency point (Qbep) 430 Pa

Measured electric power input at best efficiency point (Wbep) 160 W

Normal Power of the light system (WI) 2 W

Average illumination of the light on the cooking surface (Emiddle) 370 lux

Sound power level at highest setting (Lwa) 64 dBA

## Electrical Connection


Nominal power 278 W  
Voltage 220-240 V

Frequency (Hz) 50-60 Hz  
Power supply cable length 1000 mm

## Also available

Alternative colours available Stainless steel, Cream

Available colours KS110XE - KS110PE

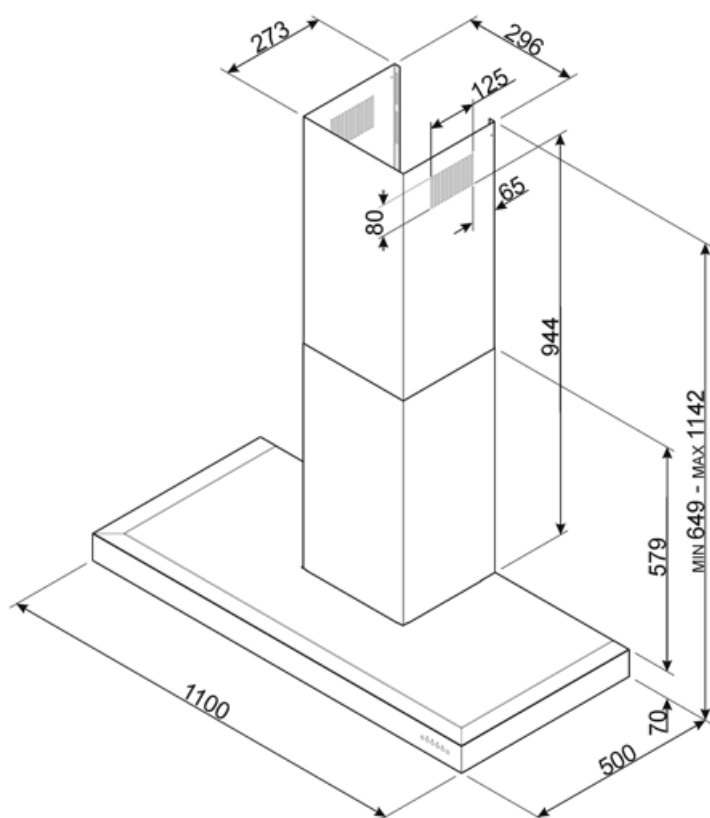

---

## Compatible Accessories

---



### FLT4

Charcoal filter Kit 1 piece



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Warning light(s):** to advise when filters need changing.



**Intensive/turbo setting:** when extra fast extraction is required.