

# KS110BLE

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Painted material
Type of steel	Brushed
EAN code	8017709201845
Aesthetic	Universale
Colour	Black
Logo	Embossed






## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Programs / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features

				
No. of lights	2	Anti-grease filters	Aluminium	
Light type	LED	Filter replacement indicator	Yes	
Light Power	1 W	Vent outlet	150 mm	
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm	
Free outlet maximum capacity	800 m³/h	Minimum distance from ELECTRIC hob	650 mm	
Motor power	275 W	Non return valve	Yes	
No. of filters	3			

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	295	51

Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

## Performance / Energy Label



**Annual Efficiency Consumption (AEChood)** 62 kWh/a  
**Energy efficiency class (EEC)** B  
**Fluid Dynamic Efficiency (FDE)** 27,9  
**Fluid Dynamic Efficiency class (FDEC)** B  
**Lighting Efficiency (LE)** 84,1 lux/W  
**Lighting Efficiency Class (LEC)** A  
**Grease Filtering Efficiency (GFE)** 78,7 %  
**Grease Filtering Efficiency Class (GFEC)** C  
**Air flow at minumum speed (Qmin)** 295 m³/h  
**Air flow at maximum speed (Qmax)** 513 m³/h  
**Air flow at boost speed (Qboost)** 702 m³/h  
**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 51 dBA

**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 64 dBA  
**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)** 72 dBA  
**Power consumption in stand-by mode (Ps)** 0,49 W  
**Time increase factor (F)** 1,00  
**Energy Efficiency Index** 58,2  
**Measured air flow rate at best efficiency point (Qbep)** 373 m³/h  
**Measured air pressure at best efficiency point (Pbep)** 430 Pa  
**Measured electric power input at best efficiency point (Wbep)** 160 W  
**Nominal Power consumption of the light system (WL)** 2 W  
**Average illumination of the light on the cooking surface (Emiddle)** 370 lux  
**Sound power level at highest setting (Lwa)** 64 dBA

## Electrical Connection


**Plug** Not present  
**Electrical connection rating** 278 W  
**Voltage** 220-240 V

**Frequency (Hz)** 50-60 Hz  
**Power supply cable length** 1000 mm

## Also available

**Alternative colours available** Stainless steel, Cream

**Available colours** KS110XE - KS110PE

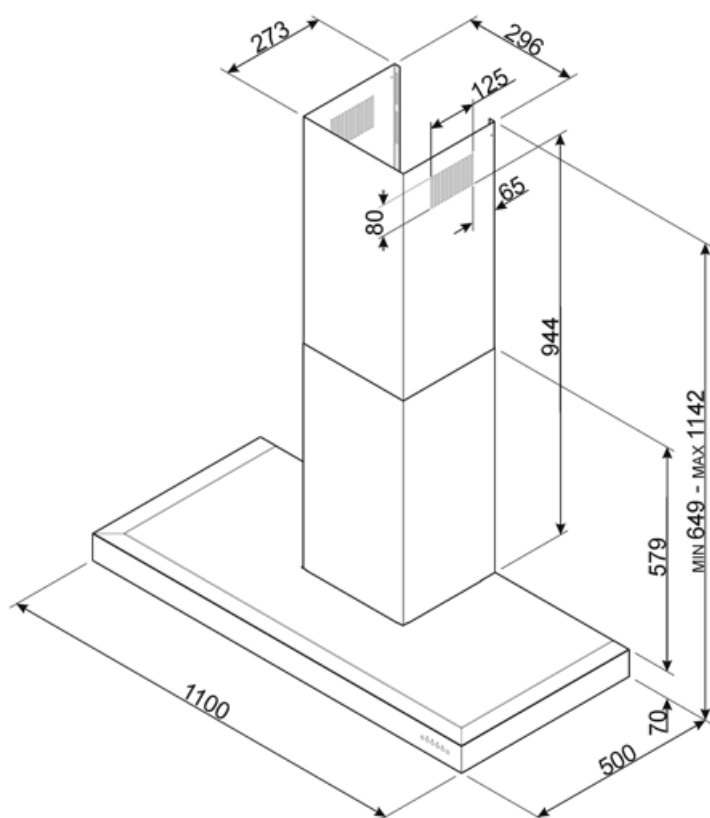

---

## Compatible Accessories

---



### FLT4

Charcoal filter Kit 1 piece



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Warning light(s):** to advise when filters need changing.



**Intensive/turbo setting:** when extra fast extraction is required.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

