KS110BLE

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Painted material
Type of steel	Brushed
EAN code	8017709201845
Hood width	110 cm
Aesthetic	Universale
Colour	Black
Logo	Embossed



Controls

Control setting	Electronic buttons

Program / Functions

No. of speeds	3
Intensive speed	BOOST
Time-setting options	

Technical Features

No. of lights	2
Light type	LED
Light Power	1 W
Light color temperature (K)	4000 K
Free outlet maximum capacity	800 m³/h
Motor power	275 W
No. of filters	3
Anti-grease filters	Aluminium
Filter replacement indicator	Yes
Vent outlet	150 mm
Minimum distance from GAS hob	750 mm
Minimum distance from ELECTRIC hob	650 mm
Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	295	51

Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	62 kWh/a
Energy efficicency class (EEC)	B
Fluid Dynamic Efficiency (FDE)	27.9
Fluid Dynamic Efficiency class (FDEC)	B
Lighting Efficiency (LE)	84.1 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	78.7 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minumum speed (Qmin)	295 m³/h
Air flow at maximum speed (Qmax)	513 m³/h
Air flow at boost speed (Qboost)	702 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	51 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Time increase factor (F)	1.00
Energy Efficiency Index	58.2
Measured air flow rate at best efficiency point (Qbep)	373 m³/h
Measured air pressure at best efficiency point (Pbep)	430 Pa
Measured electric power input at best efficiency point (Wbep)	160 W
Nominal Power consumption of the light system (WL)	2 W
Average illumination of the light on the cooking surface (Emiddle)	370 lux
Sound power level at highest setting (Lwa)	64 dBA


Electrical Connection

Electrical connection rating	278 W
Voltage	220-240 V
Frequency (Hz)	50-60 Hz


Power supply cable length	1000 mm
Plug	Not present

Also available

Alternative colours available	Stainless steel, Cream
Available colours	KS110XE - KS110PE

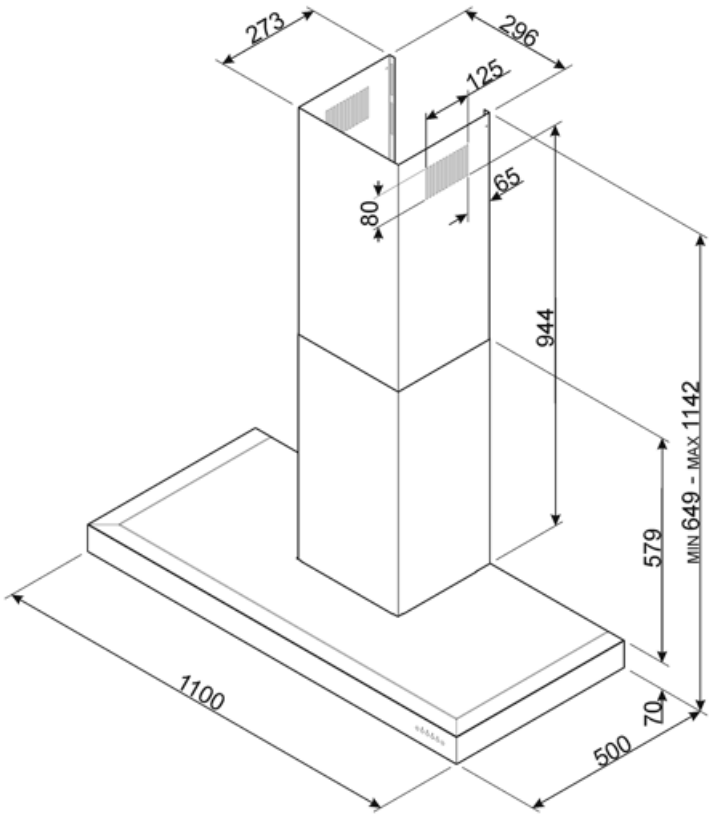
273
296
125
65
80
944
MIN 649 - MAX 1142
579
1100
70
500

Compatible Accessories



FLT4

Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.