

# KS110BLE

|                    |                      |
|--------------------|----------------------|
| Product family     | Hood                 |
| Hood Type          | Decorative wall hood |
| Design             | T flat               |
| Extraction         | Extraction           |
| Electronic control | Yes                  |
| Material           | Painted material     |
| Type of steel      | Brushed              |
| EAN code           | 8017709201845        |
| Hood width         | 110 cm               |
| Aesthetic          | Universale           |
| Colour             | Black                |
| Logo               | Embossed             |



## Controls

|                 |                    |
|-----------------|--------------------|
| Control setting | Electronic buttons |
|-----------------|--------------------|

## Program / Functions

|                      |                                                                                     |
|----------------------|-------------------------------------------------------------------------------------|
| No. of speeds        | 3                                                                                   |
| Intensive speed      |  |
| Time-setting options |  |

## Technical Features



|                                   |          |                                    |           |
|-----------------------------------|----------|------------------------------------|-----------|
| No. of lights                     | 2        | Anti-grease filters                | Aluminium |
| Light type                        | LED      | Filter replacement indicator       | Yes       |
| Light Power                       | 1 W      | Vent outlet                        | 150 mm    |
| Light color temperature scale (K) | 4000 K   | Minimum distance from GAS hob      | 750 mm    |
| Free outlet maximum capacity      | 800 m³/h | Minimum distance from ELECTRIC hob | 650 mm    |
| Motor power                       | 275 W    | Non return valve                   | Yes       |
| No. of filters                    | 3        |                                    |           |

|         | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---------|----------------------------------|----------------------------------|
| Speed 1 | 295                              | 51                               |

|                 |     |    |
|-----------------|-----|----|
| Speed 2         | 395 | 58 |
| Speed 3         | 513 | 64 |
| Intensive speed | 702 | 72 |

## Performance / Energy Label



**Annual Efficiency Consumption (AEChood)** 62 kWh/a  
**Energy efficiency class (EEC)** B  
**Fluid Dynamic Efficiency (FDE)** 27,9  
**Fluid Dynamic Efficiency class (FDEC)** B  
**Lighting Efficiency (LE)** 84,1 lux/W  
**Lighting Efficiency Class (LEC)** A  
**Grease Filtering Efficiency (GFE)** 78,7 %  
**Grease Filtering Efficiency Class (GFEC)** C  
**Air flow at minumum speed (Qmin)** 295 m³/h  
**Air flow at maximum speed (Qmax)** 513 m³/h  
**Air flow at boost speed (Qboost)** 702 m³/h


**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 51 dBA  
**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 64 dBA  
**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)** 72 dBA  
**Time increase factor (F)** 1,00  
**Energy Efficiency Index** 58,2  
**Measured air flow rate at best efficiency point (Qbep)** 373 m³/h  
**Measured air pressure at best efficiency point (Pbep)** 430 Pa  
**Measured electric power input at best efficiency point (Wbep)** 160 W  
**Nominal Power consumption of the light system (WL)** 2 W  
**Average illumination of the light on the cooking surface (Emiddle)** 370 lux  
**Sound power level at highest setting (Lwa)** 64 dBA

## Electrical Connection

**Electrical connection rating** 278 W  
**Voltage** 220-240 V  
**Frequency (Hz)** 50-60 Hz  
**Power supply cable length** 1000 mm  
**Plug** Not present

## Also available

**Alternative colours available** Stainless steel, Cream  
**Available colours** KS110XE - KS110PE

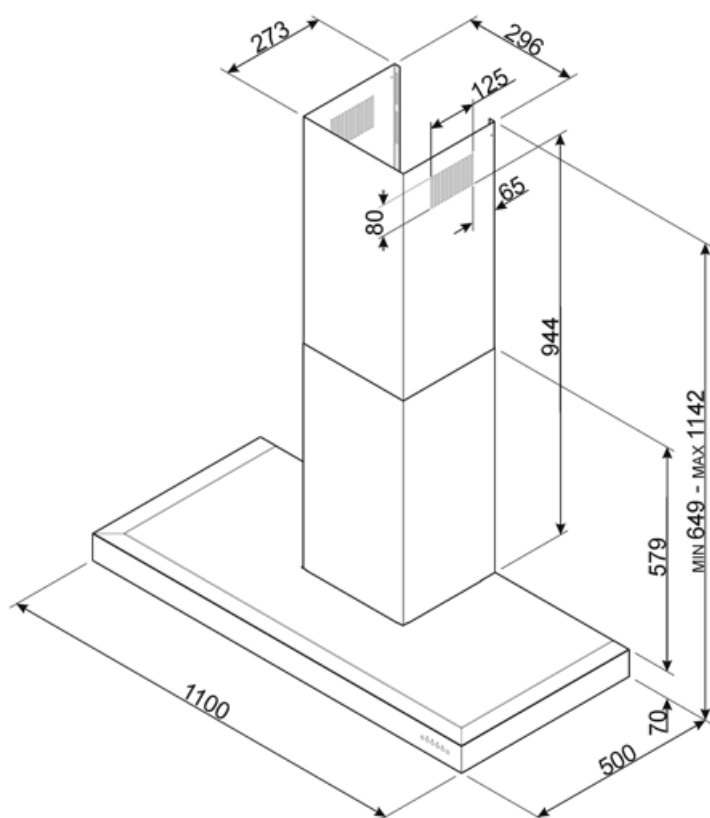

---

## Compatible Accessories

---



### FLT4

Charcoal filter Kit 1 piece



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Warning light(s):** to advise when filters need changing.



**Intensive/turbo setting:** when extra fast extraction is required.