

KS110BLE

Product family Hood

Hood Type Decorative wall hood

DesignT flatExtractionExtractionElectronic controlYes

Material Painted material

Type of steel Brushed

EAN code 8017709201845

Hood width110 cmAestheticUniversaleColourBlackLogoEmbossed



Controls

Control setting Electronic buttons

Program / Functions

No. of speeds Intensive speed

Time-setting options









Technical Features

No. of lights 2
Light type LED
Light Power 1 W

Light color temperature 4000 K

scale (K)

Free outlet maximum 800 m³/h

capacity

Motor power 275 W

No. of filters 3



Anti-grease filters Aluminium
Filter replacement Yes

indicator

Vent outlet 150 mm Minimum distance from 750 mm

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve

650 mm

alve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	295	51



Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

Performance / Energy Label

/ 6	A***
< 18	Ť

Annual Efficiency 62 kWh/a Airbourne acouistical A- 51 dBA weighted sound Power Consumption (AEChood) Emission at minimum Energy efficieency class B speed (SPEmin) (EEC) Airborne acoustical A-64 dBA Fluid Dynamic Efficiency 27.9 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency B speed (SPEmax) class (FDEC) Airbourne acoustical A- 72 dBA Lighting Efficiency (LE) 84.1 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 78.7 % Time increase factor (F) Efficiency (GFE) **Energy Efficiency Index** 58.2 **Grease Filtering** C Measured air flow rate 373 m³/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 295 m³/h (Qbep) speed (Qmin) Measured air pressure 430 Pa Air flow at maximum 513 m³/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 702 m³/h Measured electric 160 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 370 lux

Electrical Connection

Electrical connection 278 W

rating

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

the light on the cooking surface (Emiddle) Sound power level at

highest setting (Lwa)

length

Plug Not present


64 dBA

1000 mm

Also available

Alternative colours Stainless steel, Cream Available colours KS110XE - KS110PE available



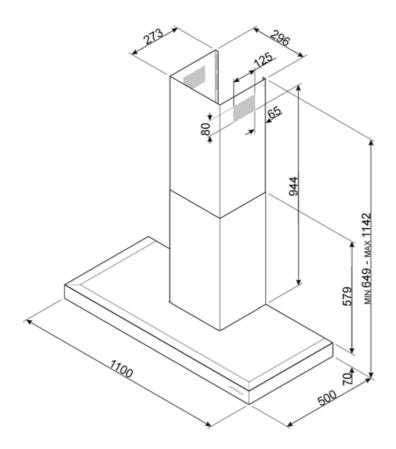



Compatible Accessories



FLT4
Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



·Ö-



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.

Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.