

KS110XE

Product family

Hood
Chimney Cooker Hoods

Design
T flat

Extraction
Ducted out or re-circulation possible

Electronic control
Yes

Material
Stainless steel

Type of steel
Brushed

EAN code
8017709201869

Hood width
110 cm

Aesthetics
Universal

Colour
Stainless steel

Finishing
Brushed

Logo
Embossed



Controls

Control setting
Electronic buttons

Program / Functions


No. of speeds
3

3

Intensive speed


Time-setting options


Technical Features



No. of lights
2

Anti-grease filters

Aluminium

Light type
LED

Filter replacement
indicator

Yes

Light power
1 W

Vent outlet

150 mm

Light colour
4000 K

Minimum distance from
GAS hob

750 mm

temperature scale (K)
Free outlet maximum
capacity

Minimum distance from
ELECTRIC hob

650 mm

Motor power
275 W

Non return valve

Yes

No. of filters
3

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	295	51

Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	62 kWh/year	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	51 dBA
Energy efficiency class (B EEC)		Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Fluid Dynamic Efficiency (FDE)	27,9	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency class (FDEC)	B	Time increase factor (F)	1,00
Lighting Efficiency (LE)	84,1 lux/W	Measured air flow rate at best efficiency point (Qbep)	373 m ³ /h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Qbep)	430 Pa
Grease Filtering Efficiency (GFE)	78,7 %	Measured electric power input at best efficiency point (Wbep)	160 W
Grease Filtering Efficiency Class (GFEC)	C	Normal Power of the light system (WI)	2 W
Air flow at minimum speed (Qmin)	295 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	370 lux
Maximum extraction rate	513 m ³ /h	Sound power level at highest setting (Lwa)	64 dBA
Intensive extraction rate	702 m ³ /h		


Electrical Connection

Nominal power	278 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		

Also available

Alternative colours available	Black, Cream	Available colours	KS110BLE - KS110PE
-------------------------------	--------------	-------------------	--------------------

Optional accessories

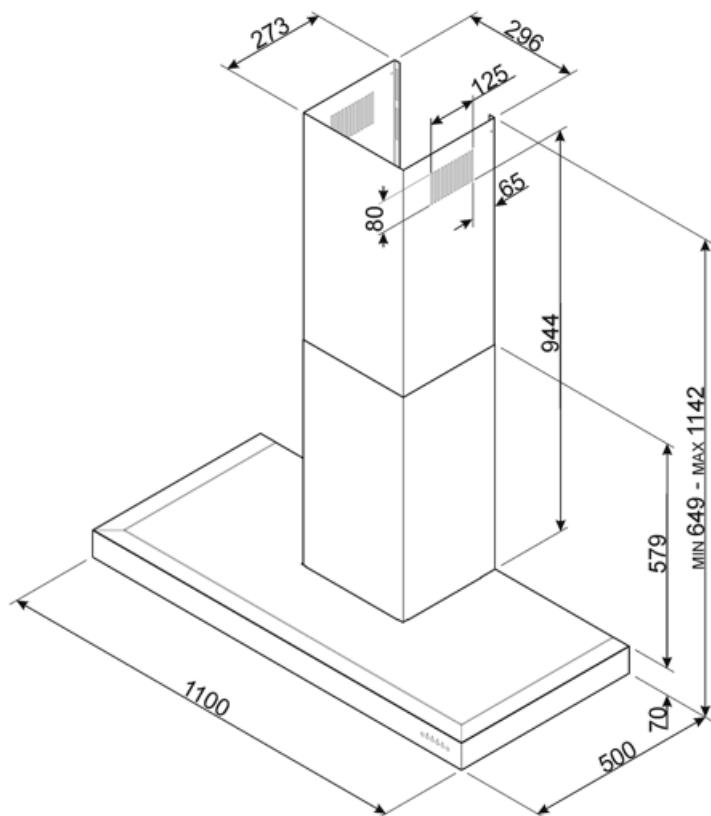

Compatible Accessories



FLT4

Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

