KS110XE

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201869
Hood width	110 cm
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Embossed



Controls

Control setting	Electronic buttons

Program / Functions

No. of speeds	3
Intensive speed	BOOST
Time-setting options	

Technical Features

No. of lights	2	**Anti-grease filters**	Aluminium
Light type	LED	**Filter replacement indicator**	Yes
Light power	1 W	**Vent outlet**	150 mm
Light colour temperature scale (K)	4000 K	**Minimum distance from GAS hob**	750 mm
Free outlet maximum capacity	800 m³/h	**Minimum distance from ELECTRIC hob**	650 mm
Motor power	275 W	**Non return valve**	Yes
No. of filters	3		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	295	51

Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	62 kWh/year
Energy efficiency class (EEC)	B
Fluid Dynamic Efficiency (FDE)	27,9
Fluid Dynamic Efficiency class (FDEC)	B
Lighting Efficiency (LE)	84,1 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	78,7 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minumum speed (Qmin)	295 m³/h
Maximum extraction rate	513 m³/h
Intensive extraction rate	702 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	51 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Time increase factor (F)	1,00
Measured air flow rate at best efficiency point (Qbep)	373 m³/h
Measured air pressure at best efficiency point (Qbep)	430 Pa
Measured electric power input at best efficiency point (Wbep)	160 W
Normal Power of the light system (Wl)	2 W
Average illumination of the light on the cooking surface (Emiddle)	370 lux
Sound power level at highest setting (Lwa)	64 dBA

Electrical Connection


Nominal power	278 W
Voltage	220-240 V
Frequency (Hz)	50-60 Hz
Power supply cable length	1000 mm
Plug	No

Also available


Alternative colours availible	Black, Cream
Available colours	KS110BLE - KS110PE

Optional accessories

Charcoal filter FLT4

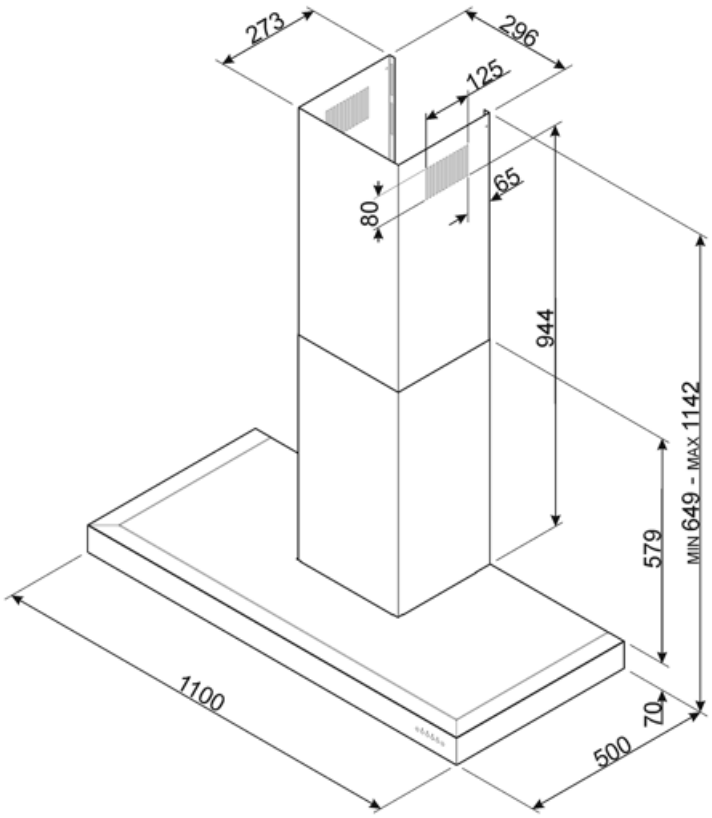

Compatible Accessories



FLT4

Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.