

# KS110XE

Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201869
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Embossed





## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features

				
No. of lights	2	Anti-grease filters	Aluminium	
Light type	LED	Filter replacement indicator	Yes	
Light power	1 W	Vent outlet	150 mm	
Light colour	4000 °K	Minimum distance from GAS hob	750 mm	
temperature scale (°K)		Minimum distance from ELECTRIC hob	650 mm	
Free outlet maximum capacity	800 m³/h	Non return valve	Yes	
Motor power	275 W			
No. of filters	3			

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	295	51

Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

## Performance / Energy Label



Annual Efficiency Consumption (AEC<sub>hood</sub>) 62 KWh/year

Energy efficiency class (EEC) B

Fluid Dynamic Efficiency (FDE) 27.9

Fluid Dynamic Efficiency class (FDEC) B

Lighting Efficiency (LE) 84.1 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 78.7 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at minimum speed (Q<sub>min</sub>) 295 m<sup>3</sup>/h

Maximum extraction rate 513 m<sup>3</sup>/h

Intensive extraction rate 702 m<sup>3</sup>/h

Airborne acoustical A-weighted sound Power Emission at minimum speed (SPE<sub>min</sub>) 51 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE<sub>max</sub>) 64 dBA

Airborne acoustical A-weighted sound power emission at boost speed (SPE<sub>boost</sub>) 72 dBA

Power consumption in stand-by mode (P<sub>s</sub>) 0.49 W

Time increase factor (F) 1.00

Measured air flow rate at best efficiency point (Q<sub>bep</sub>) 373 m<sup>3</sup>/h

Measured air pressure at best efficiency point (Q<sub>bep</sub>) 430 Pa

Measured electric power input at best efficiency point (W<sub>bep</sub>) 160 W

Normal Power of the light system (W<sub>l</sub>) 2 W

Average illumination of the light on the cooking surface (E<sub>middle</sub>) 370 lux

Sound power level at highest setting (L<sub>wa</sub>) 64 dBA

## Electrical Connection

Nominal power 278 W  
Voltage 220-240 V

Frequency (Hz) 50-60 Hz  
Power supply cable length 1000 mm

## Also available

Alternative colours available Black, Cream


Available colours KS110BLE - KS110PE

## Optional accessories

---

Charcoal filter

FLT4

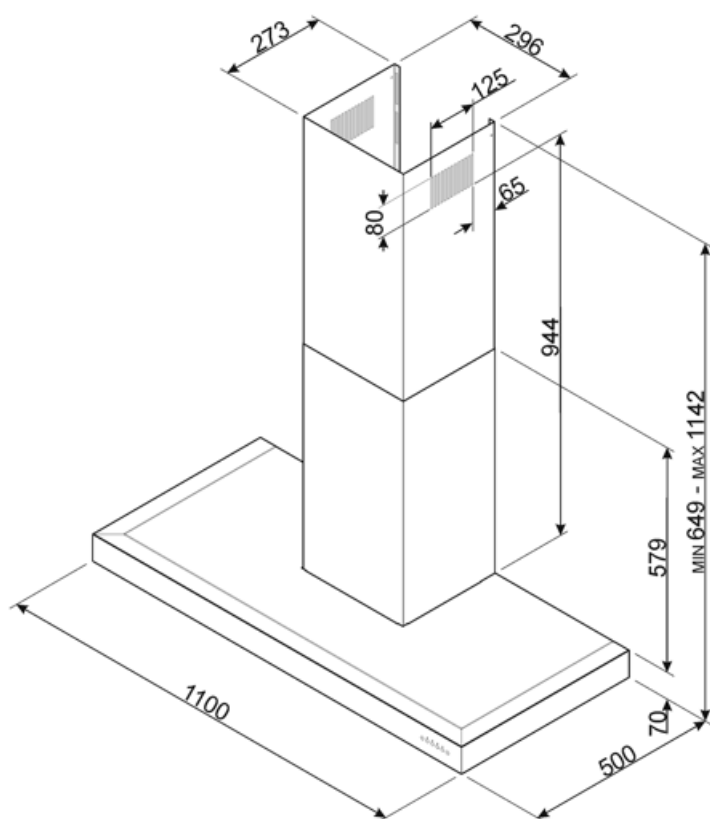

---

## Compatible Accessories

---



### FLT4

Charcoal filter Kit 1 piece



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Warning light(s):** to advise when filters need changing.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Intensive/turbo setting:** when extra fast extraction is required.

