

KS110XE

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201869
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Embossed






Controls

Control setting	Electronic buttons
-----------------	--------------------

Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features

				
No. of lights	2		Anti-grease filters	Aluminium
Light type	LED		Filter replacement indicator	Yes
Light Power	1 W		Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K		Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	800 m³/h		Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W		Non return valve	Yes
No. of filters	3			

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	295	51

Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

Performance / Energy Label



Annual Efficiency Consumption (AEChood) 62 kWh/a
Energy efficiency class (EEC) B
Fluid Dynamic Efficiency (FDE) 27,9
Fluid Dynamic Efficiency class (FDEC) B
Lighting Efficiency (LE) 84,1 lux/W
Lighting Efficiency Class (LEC) A
Grease Filtering Efficiency (GFE) 78,7 %
Grease Filtering Efficiency Class (GFEC) C
Air flow at minumum speed (Qmin) 295 m³/h
Air flow at maximum speed (Qmax) 513 m³/h
Air flow at boost speed (Qboost) 702 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 51 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 64 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 72 dBA
Time increase factor (F) 1,00
Measured air flow rate at best efficiency point (Qbep) 373 m³/h
Measured air pressure at best efficiency point (Pbep) 430 Pa
Measured electric power input at best efficiency point (Wbep) 160 W
Nominal Power consumption of the light system (WL) 2 W
Average illumination of the light on the cooking surface (Emiddle) 370 lux
Sound power level at highest setting (Lwa) 64 dBA

Electrical Connection

Plug Not present
Electrical connection rating 278 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1000 mm

Also available


Alternative colours available Black, Cream

Available colours KS110BLE - KS110PE

Optional accessories

Charcoal filter

FLT4

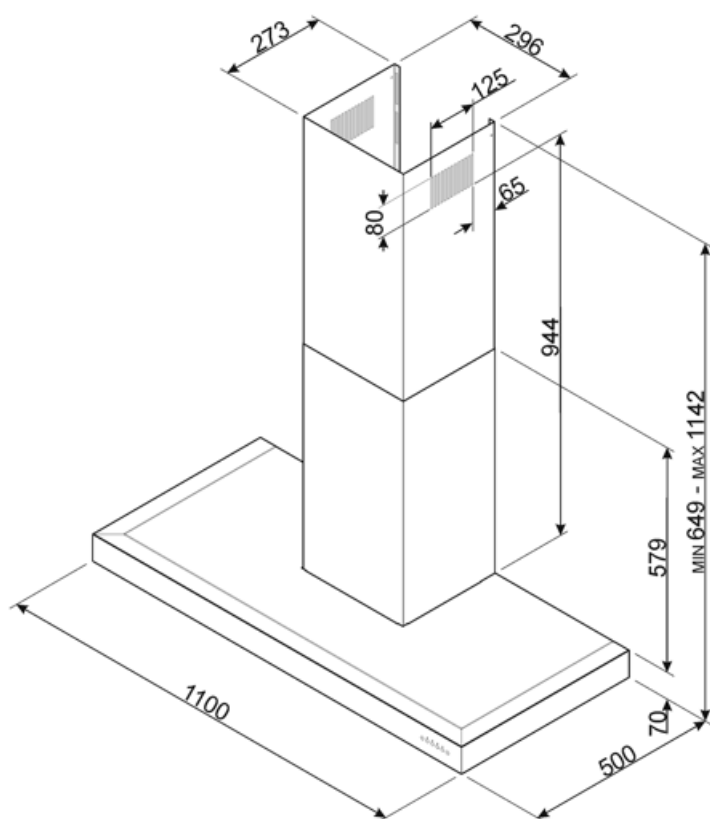

Compatible Accessories



FLT4

Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.