

# KS110XE

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201869
Hood width	110 cm



## Aesthetics

Aesthetic Colour	Universale Stainless steel	Finishing Logo	Satin Embossed
------------------	----------------------------	----------------	----------------

## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Programme / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features

				
No. of lights	2	Anti-grease filters	Aluminium	
Light type	LED	Filter replacement indicator	Yes	
Light Power	1 W	Vent outlet	150 mm	
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm	
Free outlet maximum capacity	800 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm	
Motor power	275 W			

No. of filters 3 Non return valve Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	295	51
Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	62 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	51 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Fluid Dynamic Efficiency (FDE)	27.9	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency class (FDEC)	B	Power consumption in stand-by mode (Ps)	0.49 W
Lighting Efficiency (LE)	84.1 lux/W	Time increase factor (F)	1.00
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	373 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	78.7 %	Measured air pressure at best efficiency point (Pbep)	430 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	160 W
Air flow at minumum speed (Qmin)	295 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	513 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	370 lux
Air flow at boost speed (Qboost)	702 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	64 dBA

## Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	278 W	Power supply cable length	1000 mm
Voltage	220-240 V		

## Also available

Alternative colours available

Black, Cream


Available colours

KS110BLE - KS110PE

## Optional accessories

Charcoal filter


FLT4

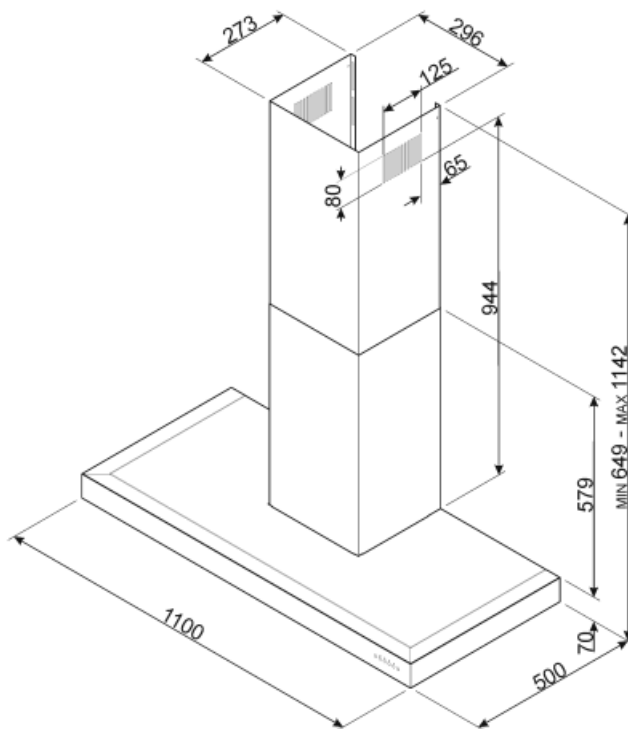

---

## Not included accessories

---



**FLT4**

Charcoal filter Kit 1 piece









**KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary (TT)

---

- |  |   |   |  |
|--|---|---|--|
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|  | Intensive/turbo setting: when extra fast extraction is required.  |  |  |