

KS110XE

Product family

Hood

Hood Type

Decorative wall hood

Design

T flat

Extraction

Extraction

Electronic control

Yes

Material

Stainless steel

Type of steel

Brushed

EAN code

8017709201869

Hood width

110 cm

Aesthetic

Universale

Colour

Stainless steel

Finishing

Satin

Logo

Embossed



Controls

Control setting

Electronic buttons

Program / Functions

No. of speeds

3


Intensive speed



Time-setting options



Technical Features



No. of lights

2

Anti-grease filters

Aluminium

Light type

LED

Filter replacement indicator

Yes

Light Power

1 W

Vent outlet

150 mm

Light color temperature scale (K)

4000 K

Minimum distance from GAS hob

750 mm

Free outlet maximum capacity

800 m³/h

Minimum distance from ELECTRIC hob

650 mm

Motor power

275 W

Non return valve

Yes

No. of filters

3

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	295	51

Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	62 kWh/a	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	51 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Fluid Dynamic Efficiency (FDE)	27.9	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency class (FDEC)	B	Time increase factor (F)	1.00
Lighting Efficiency (LE)	84.1 lux/W	Measured air flow rate at best efficiency point (Qbep)	373 m³/h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Pbep)	430 Pa
Grease Filtering Efficiency (GFE)	78.7 %	Measured electric power input at best efficiency point (Wbep)	160 W
Grease Filtering Efficiency Class (GFEC)	C	Nominal Power consumption of the light system (WL)	2 W
Air flow at minimum speed (Qmin)	295 m³/h	Average illumination of the light on the cooking surface (Emiddle)	370 lux
Air flow at maximum speed (Qmax)	513 m³/h	Sound power level at highest setting (Lwa)	64 dBA
Air flow at boost speed (Qboost)	702 m³/h		

Electrical Connection

Electrical connection rating	278 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		


Also available

Alternative colours available	Black, Cream	Available colours	KS110BLE - KS110PE
-------------------------------	--------------	-------------------	--------------------

Optional accessories

Charcoal filter

FLT4

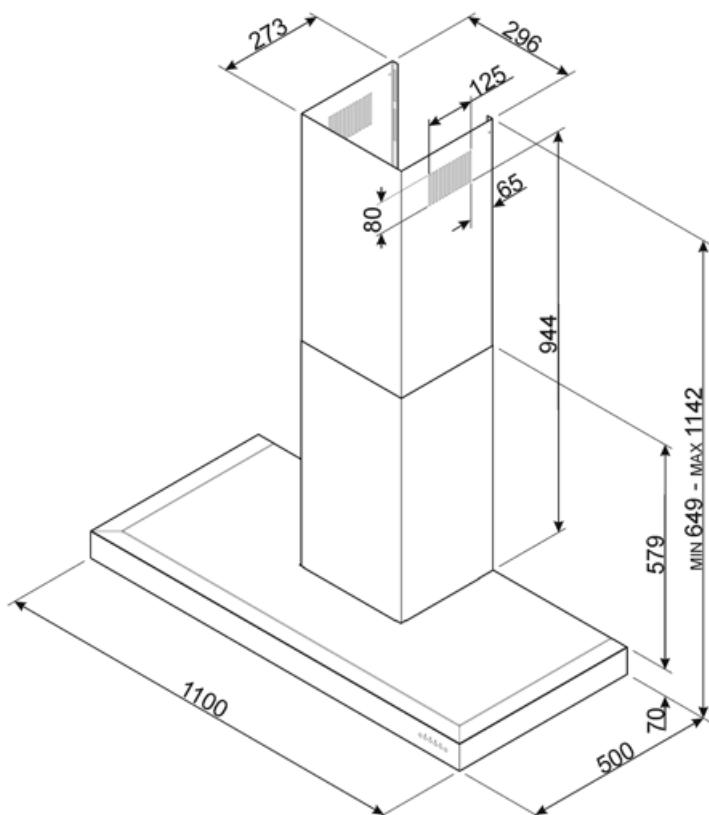

Compatible Accessories



FLT4

Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

