

KS110XE

Product family Hood

Hood Type Decorative wall hood

Design T flat Extraction Extraction **Electronic control** Yes

Stainless steel Material Type of steel Brushed

EAN code 8017709201869

Hood width 110 cm **Aesthetic** Universale Colour Stainless steel

Satin **Finishing** Logo **Embossed**



Controls

Control setting **Electronic buttons**

Program / Functions

No. of speeds Intensive speed

Time-setting options





Technical Features







No. of lights 2 Anti-grease filters Aluminium **LED** Filter replacement Light type Yes indicator

1 W **Light Power** Vent outlet

Light color temperature 4000 K scale (K)

Free outlet maximum

800 m³/h

capacity

Motor power 275 W No. of filters 3

Minimum distance from

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve

650 mm

150 mm

750 mm

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	295	51



Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

Performance / Energy Label

_/	A***
	Ţ.

Annual Efficiency 62 kWh/a Airbourne acouistical A- 51 dBA weighted sound Power Consumption (AEChood) Emission at minimum Energy efficieency class B speed (SPEmin) (EEC) Airborne acoustical A-64 dBA Fluid Dynamic Efficiency 27.9 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency B speed (SPEmax) class (FDEC) Airbourne acoustical A- 72 dBA Lighting Efficiency (LE) 84.1 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 78.7 % Time increase factor (F) Efficiency (GFE) Measured air flow rate 373 m³/h **Grease Filtering** C at best efficiency point Efficiency Class (GFEC) (Qbep) Air flow at minumum 295 m³/h Measured air pressure 430 Pa speed (Qmin) at best efficiency point Air flow at maximum 513 m³/h (Pbep) speed (Qmax) Measured electric 160 W Air flow at boost speed 702 m³/h power input at best (Qboost) efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 370 lux the light on the cooking surface (Emiddle)

Electrical Connection

Electrical connection 278 W

rating

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

Sound power level at

highest setting (Lwa)

length

Plug

1000 mm

64 dBA

Not present

Also available


Alternative colours Black, Cream Available colours KS110BLE - KS110PE available



Optional accessories

Charcoal filter

FLT4

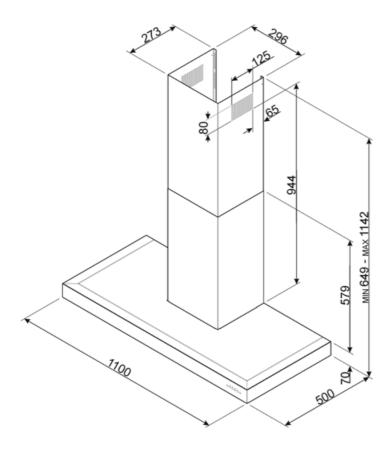



Compatible Accessories



FLT4
Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



·Ö-



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.

Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.