

# KS59AOE2

|                      |                      |
|----------------------|----------------------|
| Product family       | Hood                 |
| Hood Type            | Decorative wall hood |
| Design               | Chimney              |
| Extraction           | Extraction           |
| Material             | Heat-moulded         |
| Type of steel        | Brushed              |
| EAN code             | 8017709303235        |
| Hood width           | 60 cm                |
| Aesthetic            | Coloniale            |
| Colour               | Anthracite           |
| Components finishing | Antique brass        |
| Logo                 | Applied              |





## Controls

|                 |               |                 |           |
|-----------------|---------------|-----------------|-----------|
| Control setting | Control knobs | Control knobs   | Colonial  |
| No. of controls | 2             | Controls colour | Old Brass |

## Program / Functions

|                 |   |
|-----------------|---|
| No. of speeds   | 3   |
| Intensive speed |  |

## Technical Features

|  |   |                                    |                 |
|--|---|------------------------------------|-----------------|
|  |  |                                    |                 |
| No. of lights  | 2   | No. of filters                     | 2               |
| Light type   | LED   | Anti-grease filters                | Stainless steel |
| Light Power  | 1 W   | Vent outlet                        | 150 mm          |
| Light color temperature scale (K)  | 3000 K  | Minimum distance from GAS hob      | 750 mm          |
| Free outlet maximum capacity   | 820 m³/h  | Minimum distance from ELECTRIC hob | 650 mm          |
| Motor power  | 275 W   | Non return valve                   | Yes             |

|         | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---------|----------------------------------|----------------------------------|
| Speed 1 | 311                              | 49                               |
| Speed 2 | 439                              | 57                               |

|                 |     |    |
|-----------------|-----|----|
| Speed 3         | 522 | 62 |
| Intensive speed | 754 | 70 |

## Performance / Energy Label



|  |             |
|--|-------------|
| Annual Efficiency Consumption (AEChood)  | 58 kWh/a    |
| Energy efficiency class (EEC)            | A           |
| Fluid Dynamic Efficiency (FDE)           | 29,9        |
| Fluid Dynamic Efficiency class (FDEC)    | A           |
| Lighting Efficiency (LE)                 | 118,2 lux/W |
| Lighting Efficiency Class (LEC)          | A           |
| Grease Filtering Efficiency (GFE)        | 70,8 %      |
| Grease Filtering Efficiency Class (GFEC) | D           |
| Air flow at minumum speed (Qmin)         | 311 m³/h    |
| Air flow at maximum speed (Qmax)         | 522 m³/h    |
| Air flow at boost speed (Qboost)         | 754 m³/h    |


|  |          |
|--|----------|
| Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 49 dBA   |
| Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 63 dBA   |
| Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 70 dBA   |
| Time increase factor (F)   | 0,9      |
| Energy Efficiency Index  | 52,3     |
| Measured air flow rate at best efficiency point (Qbep)                         | 418 m³/h |
| Measured air pressure at best efficiency point (Pbep)                          | 443 Pa   |
| Measured electric power input at best efficiency point (Wbep)                  | 172 W    |
| Nominal Power consumption of the light system (WL)                             | 2 W      |
| Average illumination of the light on the cooking surface (Emiddle)             | 260 lux  |
| Sound power level at highest setting (Lwa)                                     | 63 dBA   |

## Electrical Connection

|                              |           |                           |             |
|------------------------------|-----------|---------------------------|-------------|
| Electrical connection rating | 277 W     | Power supply cable length | 1000 mm     |
| Voltage                      | 220-240 V | Plug                      | Not present |
| Frequency (Hz)               | 50-60 Hz  |                           |             |

## Also available

|                               |       |                   |          |
|-------------------------------|-------|-------------------|----------|
| Alternative colours available | Cream | Available colours | KS59POE2 |
|-------------------------------|-------|-------------------|----------|

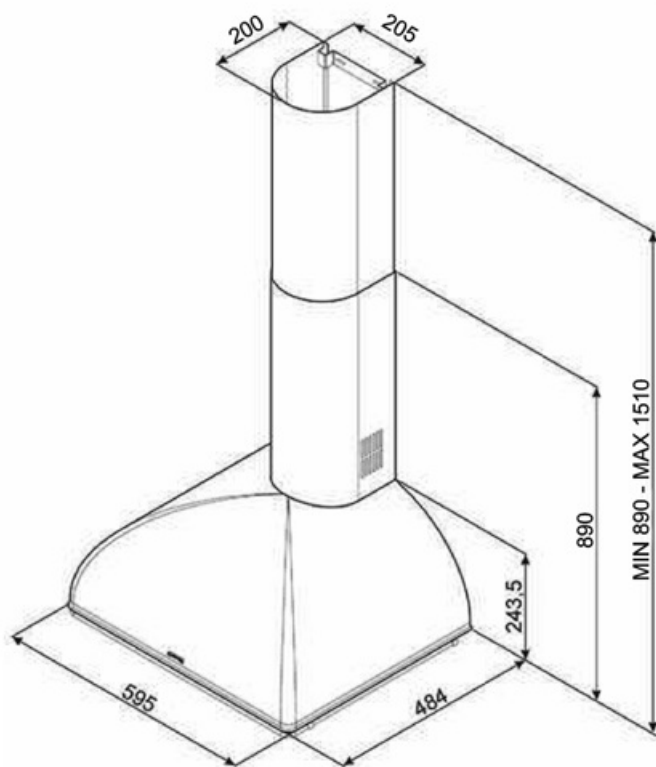

---

## Compatible Accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Energy efficiency class A**



**Intensive/turbo setting:** when extra fast extraction is required.