

# KS59POE2

Product family Hood

Hood Type Decorative wall hood

Design Chimney
Extraction Extraction
Material Heat-moulded
Type of steel Brushed

EAN code 8017709303242

Hood width 60 cm
Aesthetic Coloniale
Colour Cream

Components finishing Antique brass

Logo Applied



### **Controls**

Control settingControl knobsControl knobsColonialNo. of controls2Controls colourOld Brass

## **Program / Functions**

No. of speeds Intensive speed



### **Technical Features**



No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersStainless steelLight Power1 WVent outlet150 mmLight color temperature3000 KMinimum distance from750 mm

scale (K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	311	49
Speed 2	439	57



Speed 3	522	62
Intensive speed	754	70

## Performance / Energy Label

	A
	Ť.

**Annual Efficiency** 58 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-63 dBA Fluid Dynamic Efficiency 29,9 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 70 dBA Lighting Efficiency (LE) 118,2 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 70.8 % Time increase factor (F) 0,9 Efficiency (GFE) **Energy Efficiency Index** 52,3 **Grease Filtering** Measured air flow rate 418 m<sup>3</sup>/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 311 m3/h (Qbep) speed (Qmin) Measured air pressure 443 Pa Air flow at maximum 522 m<sup>3</sup>/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 754 m<sup>3</sup>/h Measured electric 172 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 260 lux the light on the cooking surface (Emiddle)

### **Electrical Connection**

Electrical connection 277 W

rating

available

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

Sound power level at

highest setting (Lwa)

length

Plug Not present


63 dBA

1000 mm

#### Also available

Alternative colours Anthracite Available colours KS59AOE2



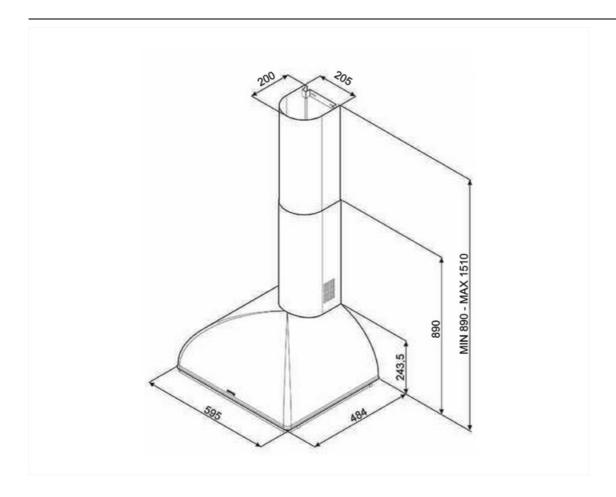



# **Compatible Accessories**

#### FLT6

Round Charcoal filters (kit 2 pieces)





#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



# Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.