

KS89POE

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Painted material
Type of steel	Brushed
EAN code	8017709211882
Hood width	90 cm
Aesthetic	Coloniale
Colour	Cream
Components finishing	Antique brass
Logo	Applied



Controls

Control setting	Control knobs	Control knobs	Colonial
No. of controls	2	Controls colour	Old Brass

Program / Functions

No. of speeds	3
Intensive speed	

Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Stainless steel
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (K)	3000 K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	331	52
Speed 2	439	57

Speed 3	547	63
Intensive speed	788	71

Performance / Energy Label


	Annual Efficiency Consumption (AEChood)	55 kWh/a	Airbourne acoustical A- weighted sound Power	52 dBA
	Energy efficiency class (EEC)	A	Emission at minimum speed (SPEmin)	
	Fluid Dynamic Efficiency (FDE)	31	Airborne acoustical A- weighted sound Power	63 dBA
	Fluid Dynamic Efficiency class (FDEC)	A	Emission at maximum speed (SPEmax)	
	Lighting Efficiency (LE)	90,9 lux/W	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	71 dBA
	Lighting Efficiency Class (LEC)	A		
	Grease Filtering Efficiency (GFE)	80,1 %	Time increase factor (F)	0,9
	Grease Filtering Efficiency Class (GFEC)	C	Energy Efficiency Index	51,9
	Air flow at minimum speed (Qmin)	331 m³/h	Measured air flow rate at best efficiency point (Qbep)	406 m³/h
	Air flow at maximum speed (Qmax)	547 m³/h	Measured air pressure at best efficiency point (Pbep)	449 Pa
	Air flow at boost speed (Qboost)	788 m³/h	Measured electric power input at best efficiency point (Wbep)	164 W
			Nominal Power consumption of the light system (WL)	2 W
			Average illumination of the light on the cooking surface (Emiddle)	200 lux
			Sound power level at highest setting (Lwa)	63 dBA

Electrical Connection

Electrical connection rating	277 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

Also available

Alternative colours available	Anthracite, Gunmetal, Copper	Available colours	KS89PE-KS89DE-KS89RAE-KS89AE-KSE89AOE
--------------------------------------	------------------------------	--------------------------	---------------------------------------

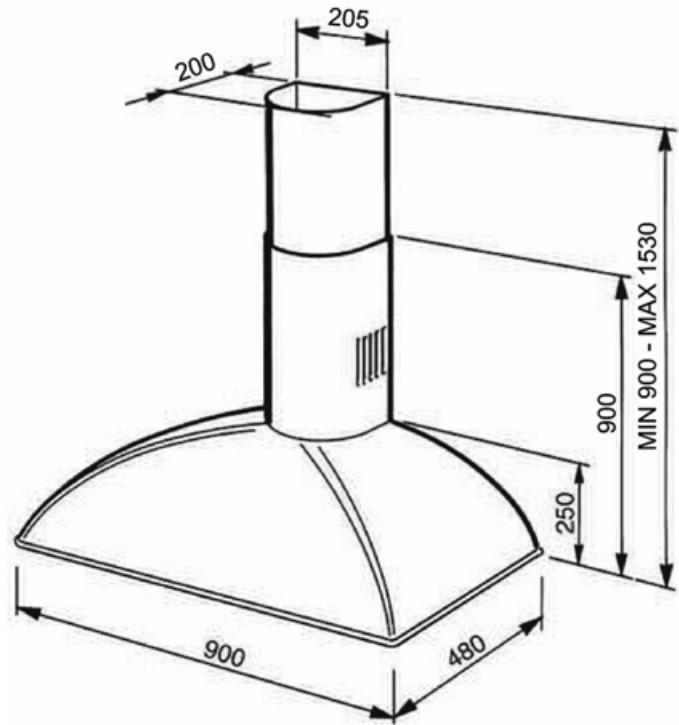

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Energy efficiency class A



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.