

# KS89POE

|                      |                      |
|----------------------|----------------------|
| Product family       | Hood                 |
| Tipo de Exaustor     | Decorative wall hood |
| Design               | Chimney              |
| Extraction           | Extraction           |
| Electronic control   | No                   |
| Perimeter extraction | No                   |
| Material             | Painted material     |
| Type of steel        | Brushed              |
| EAN code             | 8017709211882        |
| Aesthetic            | Colonial             |
| Colour               | Cream                |
| Components finishing | Antique brass        |
| Logotipo             | Logotipo aplicado    |



## Controls

|                 |               |                 |           |
|-----------------|---------------|-----------------|-----------|
| Control setting | Control knobs | Control knobs   | Colonial  |
| No. of controls | 2             | Controls colour | Old Brass |

## Program / Functions

|                         |                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------|
| No. of speeds           | 3                                                                                   |
| Intensive speed         |  |
| 24h air filter function | No                                                                                  |
| Other functions         | No                                                                                  |
| Time-setting options    | No                                                                                  |
| Other options           | No                                                                                  |
| Ventilação automática   | No                                                                                  |

## Technical Features

|                                                                                    |                                                                                     |                               |                 |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------|-----------------|
|  |  |                               |                 |
| Hood without motor                                                                 | No                                                                                  | No. of filters                | 3               |
| Remote motor                                                                       | No                                                                                  | Anti-grease filters           | Stainless steel |
| No. of lights                                                                      | 2                                                                                   | Charcoal filters included     | No              |
| Light type                                                                         | LED                                                                                 | Filter replacement indicator  | No              |
| Light Power                                                                        | 1 W                                                                                 | Vent outlet                   | 150 mm          |
| Dimmer mode                                                                        | No                                                                                  | Minimum distance from GAS hob | 750 mm          |
| Escala de temperatura de cor clara (°K)                                            | 3000 °K                                                                             |                               |                 |

|                              |          |                                    |        |
|------------------------------|----------|------------------------------------|--------|
| Free outlet maximum capacity | 820 m³/h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power                  | 275 W    | Non return valve                   | Yes    |

|                 | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|----------------------------------|----------------------------------|
| Speed 1         | 331                              | 52                               |
| Speed 2         | 439                              | 57                               |
| Speed 3         | 547                              | 63                               |
| Intensive speed | 788                              | 71                               |

## Accessories Included

|                |    |                |    |
|----------------|----|----------------|----|
| Remote control | No | Tube reduction | No |
| Sliding door   | No |                |    |

## Performance / Energy Label




|                                          |            |                                                                                |          |
|------------------------------------------|------------|--------------------------------------------------------------------------------|----------|
| Consumo anual de energía (CAE exaustor)  | 55 kWh/a   | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 52 dBA   |
| Energy efficiency class (EEC)            | A          | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 63 dBA   |
| Fluid Dynamic Efficiency (FDE)           | 31         | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 71 dBA   |
| Fluid Dynamic Efficiency class (FDEC)    | A          | Time increase factor (F)                                                       | 0,9      |
| Lighting Efficiency (LE)                 | 90,9 lux/W | Energy Efficiency Index                                                        | 51,9     |
| Lighting Efficiency Class (LEC)          | A          | Measured air flow rate at best efficiency point (Qbep)                         | 406 m³/h |
| Grease Filtering Efficiency (GFE)        | 80,1 %     | Measured air pressure at best efficiency point (Pbep)                          | 449 Pa   |
| Grease Filtering Efficiency Class (GFEC) | C          | Measured electric power input at best efficiency point (Wbep)                  | 164 W    |
| Air flow at minumum speed (Qmin)         | 331 m³/h   | Nominal Power consumption of the light system (WL)                             | 2 W      |
| Air flow at maximum speed (Qmax)         | 547 m³/h   | Average illumination of the light on the cooking surface (Emiddle)             | 200 lux  |
| Air flow at boost speed (Qboost)         | 788 m³/h   | Sound power level at highest setting (Lwa)                                     | 63 dBA   |

## Electrical Connection

|                              |           |                                    |          |
|------------------------------|-----------|------------------------------------|----------|
| Plug                         | No        | Frequency (Hz)                     | 50-60 Hz |
| Electrical connection rating | 277 W     | Comprimento do cabo de alimentação | 1000 mm  |
| Voltage                      | 220-240 V |                                    |          |

## Also available

|                          |                                               |                                      |                                       |
|--------------------------|-----------------------------------------------|--------------------------------------|---------------------------------------|
| Outras cores disponíveis | Antracite, Cor de ferro fundido, Cor de cobre | Códigos das outras cores disponíveis | KS89PE-KS89DE-KS89RAE-KS89AE-KSE89AOE |
|--------------------------|-----------------------------------------------|--------------------------------------|---------------------------------------|

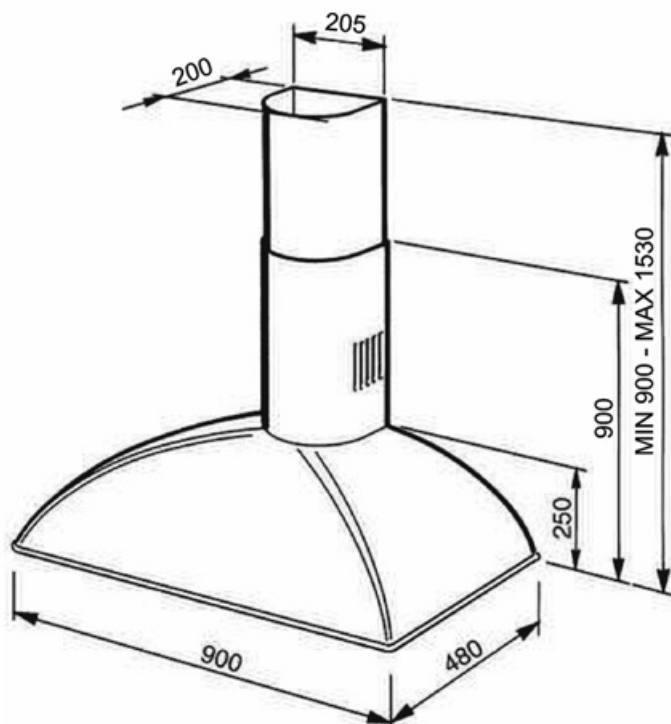

---

## Compatible Accessories

---



### FLT6

Filtros de carvão redondos (kit 2 peças)



### KITALLFC

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos

---

## Symbols glossary

---



**Filtros:** O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



**Luzes:** Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



**R:** Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos



**Configuração intensiva/turbo:** quando a extração extra rápida é necessária.