

# KS905BXE2



Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709254438
Hood width	90 cm



## Aesthetics

Aesthetic	Linea	Glass Type	White
Colour	Stainless steel	Logo	Embossed
Finishing	Satin		

## Controls

			
Control setting	Touch control	Display	Yes
Led color	Ice		

## Programme / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features

				
No. of lights	2	No. of filters	3	
Light type	LED	Anti-grease filters	Aluminium	
Light Power	1 W	Vent outlet	150 mm	
Dimmer mode	Yes			

Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	320	50
Speed 2	401	61
Speed 3	564	65
Intensive speed	767	73

## Performance / Energy Label

A

Annual Efficiency Consumption (AEChood)	57 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dB(A)
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dB(A)
Fluid Dynamic Efficiency (FDE)	29,8	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	83,2 lux/W	Energy Efficiency Index	52,2
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	402 m³/h
Grease Filtering Efficiency (GFE)	83,2 %	Measured air pressure at best efficiency point (Pbep)	451 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	169 W
Air flow at minumum speed (Qmin)	320 m³/h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	564 m³/h	Average illumination of the light on the cooking surface (Emiddle)	183 lux
Air flow at boost speed (Qboost)	767 m³/h	Sound power level at highest setting (Lwa)	65 dB(A)
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dB(A)		


## Electrical Connection

Electrical connection rating	278 W	Frequency (Hz)	50-60 Hz
------------------------------	-------	----------------	----------

Voltage	220-240 V	Power supply cable length	1000 mm
---------	-----------	---------------------------	---------

## Also available


Alternative colours available	Black, Silver Glass	Available colours	KSE905NXE2 - KSE905SXE2
-------------------------------	---------------------	-------------------	-------------------------

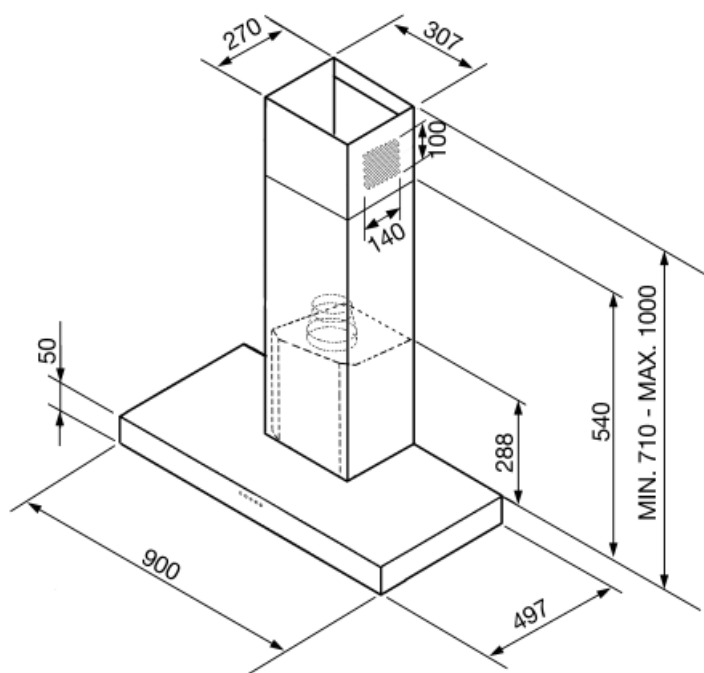

---

## Not included accessories

---



### KITFC906

Charcoal filter Kit 1 piece











### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary (TT)

---

	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Dimmering Lights		LED display: to show programmes, functions and options selected and the time to the end of the cycle.
	A: Product drying performance, measured from A+++ to D / G depending on the product family		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.