

KS905SXE2



Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	T flat
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709253646
Hood width	90 cm



Aesthetics

Aesthetics	Linea	Glass Type	Stopsol
Colour	Stainless steel	Logo	Embossed
Finishing	Brushed		

Controls

			
Control setting	Touch control	Display	Yes
Led colour	Ice		

Programs / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features

				
No. of lights	2	No. of filters	3	
Light type	LED	Anti-grease filters	Aluminium	
Light power	1 W	Vent outlet	150 mm	
Dimmer mode	Yes			

Light colour temperature scale (°K)	4000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	320	50
Speed 2	401	61
Speed 3	564	65
Intensive speed	767	73

Performance / Energy Label

A

Annual Efficiency Consumption (AEChood)	57 KWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dB(A)
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dB(A)
Fluid Dynamic Efficiency (FDE)	29.8	Power Consumption in Off mode (Po)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.9
Lighting Efficiency (LE)	83.2 lux/W	Energy Efficiency Index per first cavity	52.2
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	402 m³/h
Grease Filtering Efficiency (GFE)	83.2 %	Measured air pressure at best efficiency point (Qbep)	451 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	169 W
Air flow at minumum speed (Qmin)	320 m³/h	Normal Power of the light system (WI)	2 W
Maximum extraction rate	564 m³/h	Average illumination of the light on the cooking surface (Emiddle)	183 lux
Intensive extraction rate	767 m³/h	Sound power level at highest setting (Lwa)	65 dB(A)
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dB(A)		


Electrical Connection

Nominal power	278 W	Frequency (Hz)	50-60 Hz
---------------	-------	----------------	----------


Voltage	220-240 V	Power supply cable length	1000 mm
---------	-----------	---------------------------	---------

Also available

Alternative colours available	White, Black	Available colours	KS905BXE2 - KS905NXE2
-------------------------------	--------------	-------------------	-----------------------

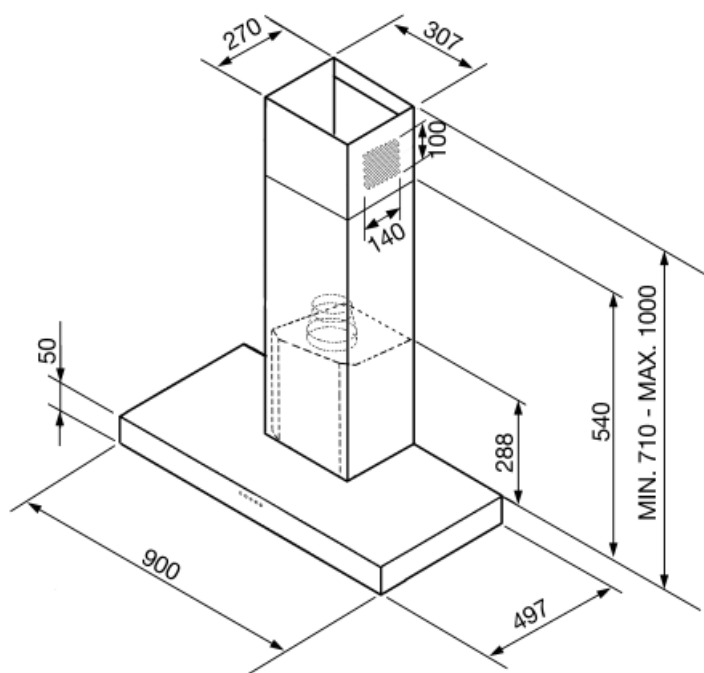

Not included accessories



KITFC906

Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



...