

KS905SXE2

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709253646
Hood width	90 cm
Aesthetic	Linea
Colour	Stainless steel
Finishing	Satin
Glass Type	Stopsol
Logo	Embossed



Controls



Control setting	Touch control	Display	Yes
Led color	Ice		

Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features



No. of lights	2
Light type	LED
Light Power	1 W
Dimmer mode	Yes
Light color temperature scale (K)	4000 K
Free outlet maximum capacity	820 m³/h
Motor power	275 W

No. of filters	3
Anti-grease filters	Aluminium
Vent outlet	150 mm
Minimum distance from GAS hob	650 mm
Minimum distance from ELECTRIC hob	650 mm
Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	320	50
Speed 2	401	61
Speed 3	564	65
Intensive speed	767	73

Performance / Energy Label



Annual Efficiency Consumption (AEChood)	57 kWh/a
Energy efficiency class (EEC)	A
Fluid Dynamic Efficiency (FDE)	29,8
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	83,2 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	83,2 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minumum speed (Qmin)	320 m³/h
Air flow at maximum speed (Qmax)	564 m³/h
Air flow at boost speed (Qboost)	767 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dBA
Time increase factor (F)	0,9
Energy Efficiency Index	52,2
Measured air flow rate at best efficiency point (Qbep)	402 m³/h
Measured air pressure at best efficiency point (Pbep)	451 Pa
Measured electric power input at best efficiency point (Wbep)	169 W
Nominal Power consumption of the light system (WL)	2 W
Average illumination of the light on the cooking surface (Emiddle)	183 lux
Sound power level at highest setting (Lwa)	65 dBA

Electrical Connection

Electrical connection rating	278 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		


Also available

Alternative colours
available

White, Black

Available colours

KS905BXE2 - KS905NXE2

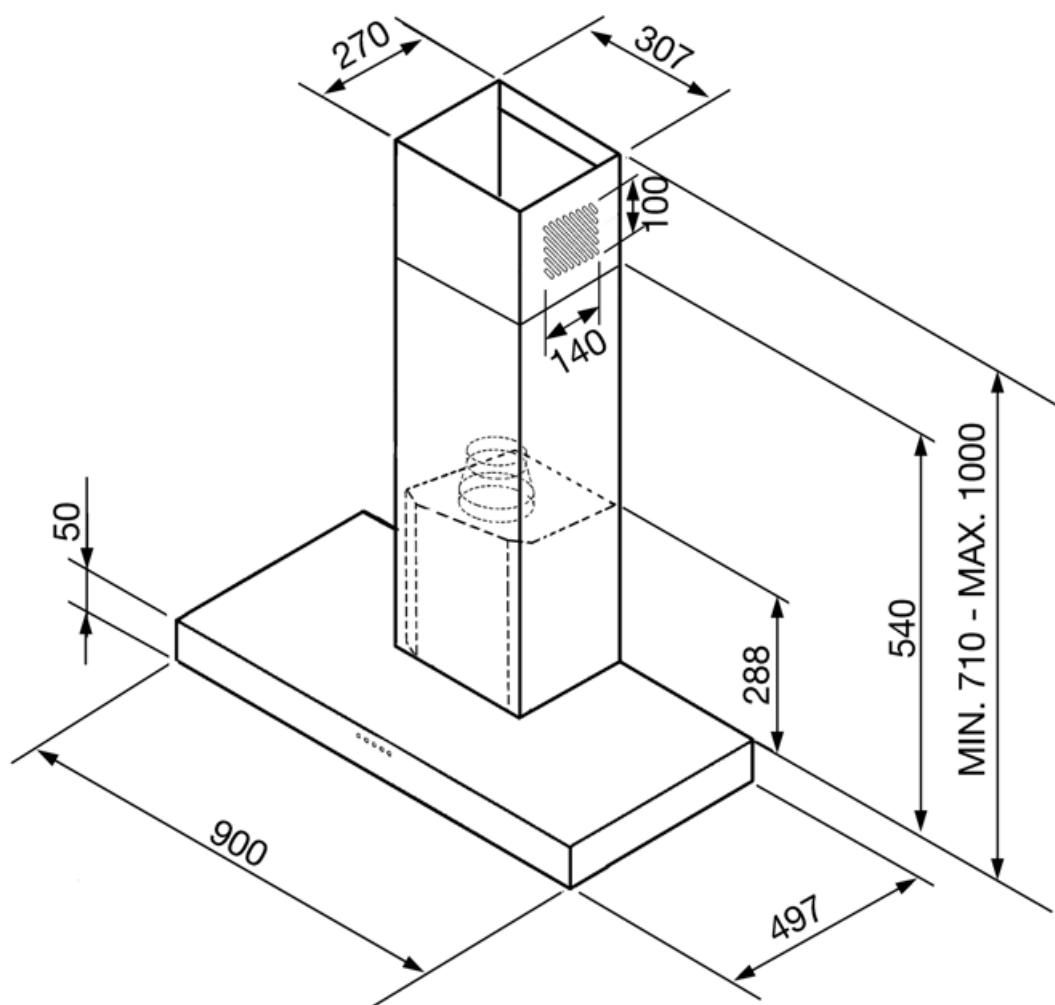


Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFC906

Charcoal filter Kit 1 piece

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



Dimmering Lights