

KS90AE

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Extraction
Material	Painted material
Type of steel	Brushed
EAN code	8017709201937
Hood width	90 cm



Aesthetics

Aesthetic	Universale	Logo	Embossed
Colour	Anthracite		



Controls

Control setting	Buttons
-----------------	---------

Programme / Functions

No. of speeds	3
---------------	---

Technical Features

			
No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	610 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	200 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	232	47
Speed 2	323	51
Speed 3	570	68

Accessories Included

Tube reduction Yes

Performance / Energy Label

B

Annual Efficiency Consumption (AEChood)	54 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	68 dB(A)
Energy efficiency class (EEC)	B	Power Consumption in Off mode (Po)	0,05 W
Fluid Dynamic Efficiency (FDE)	25,3	Power consumption in stand-by mode (Ps)	0,00 W
Fluid Dynamic Efficiency class (FDEC)	B	Time increase factor (F)	1,1
Lighting Efficiency (LE)	105,5 lux/W	Measured air flow rate at best efficiency point (Qbep)	317 m³/h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Pbep)	375 Pa
Grease Filtering Efficiency (GFE)	80,9 %	Measured electric power input at best efficiency point (Wbep)	131 W
Grease Filtering Efficiency Class (GFEC)	C	Nominal Power consumption of the light system (WL)	2 W
Air flow at minumum speed (Qmin)	232 m³/h	Average illumination of the light on the cooking surface (Emiddle)	232 lux
Air flow at maximum speed (Qmax)	570 m³/h	Sound power level at highest setting (Lwa)	68 dB(A)
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dB(A)		

Electrical Connection

Electrical connection rating	240 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm

Also available


Alternative colours
available

Anthracite


Optional accessories

Charcoal filter

FLT4

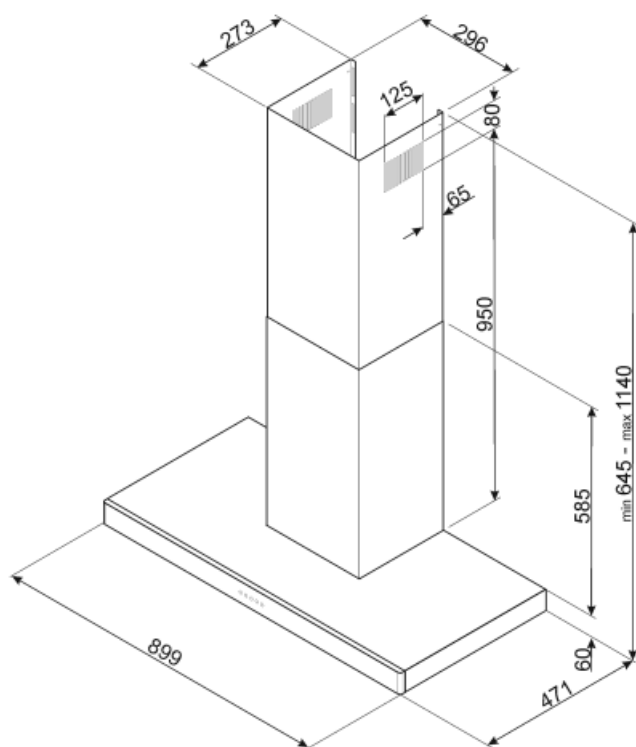

Not included accessories



FLT4

Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



B: Product energy rating, measured from A+++ to D / G depending on the product family.