

KS912BXE2

Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709257286
Aesthetic	Linea
Colour	Stainless steel
Acabamento	Satin
Glass Type	White
Logotipo	Logotipo embutido





Controls



Control setting	Touch control	Display	Yes
Led color	Ice		

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features



Hood without motor	No	No. of filters	3
Remote motor	No	Anti-grease filters	Stainless steel
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	Yes
Light Power	1 W		
Dimmer mode	Yes	Vent outlet	150 mm

Escala de temperatura de cor clara (°K)	4000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	311	55
Speed 2	401	61
Speed 3	534	66
Intensive speed	756	73

Accessories Included

Remote control	No	Tube reduction	Yes
Sliding door	No		

Performance / Energy Label




Consumo anual de energia (CAE exaustor)	66 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dBA
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dBA
Fluid Dynamic Efficiency (FDE)	27,5	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	B	Time increase factor (F)	1,00
Lighting Efficiency (LE)	105 lux/W	Energy Efficiency Index	58,6
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	393 m³/h
Grease Filtering Efficiency (GFE)	81,1 %	Measured air pressure at best efficiency point (Pbep)	437 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	174 W
Air flow at minumum speed (Qmin)	311 m³/h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	534 m³/h	Average illumination of the light on the cooking surface (Emiddle)	231 lux
Air flow at boost speed (Qboost)	756 m³/h	Sound power level at highest setting (Lwa)	66 dBA
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	55 dBA		

Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	278 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

Also available

Outras cores disponíveis	Preta, Aço inox	Códigos das outras cores disponíveis	KS912NXE2 - KS912SXE2
--------------------------	-----------------	--------------------------------------	-----------------------

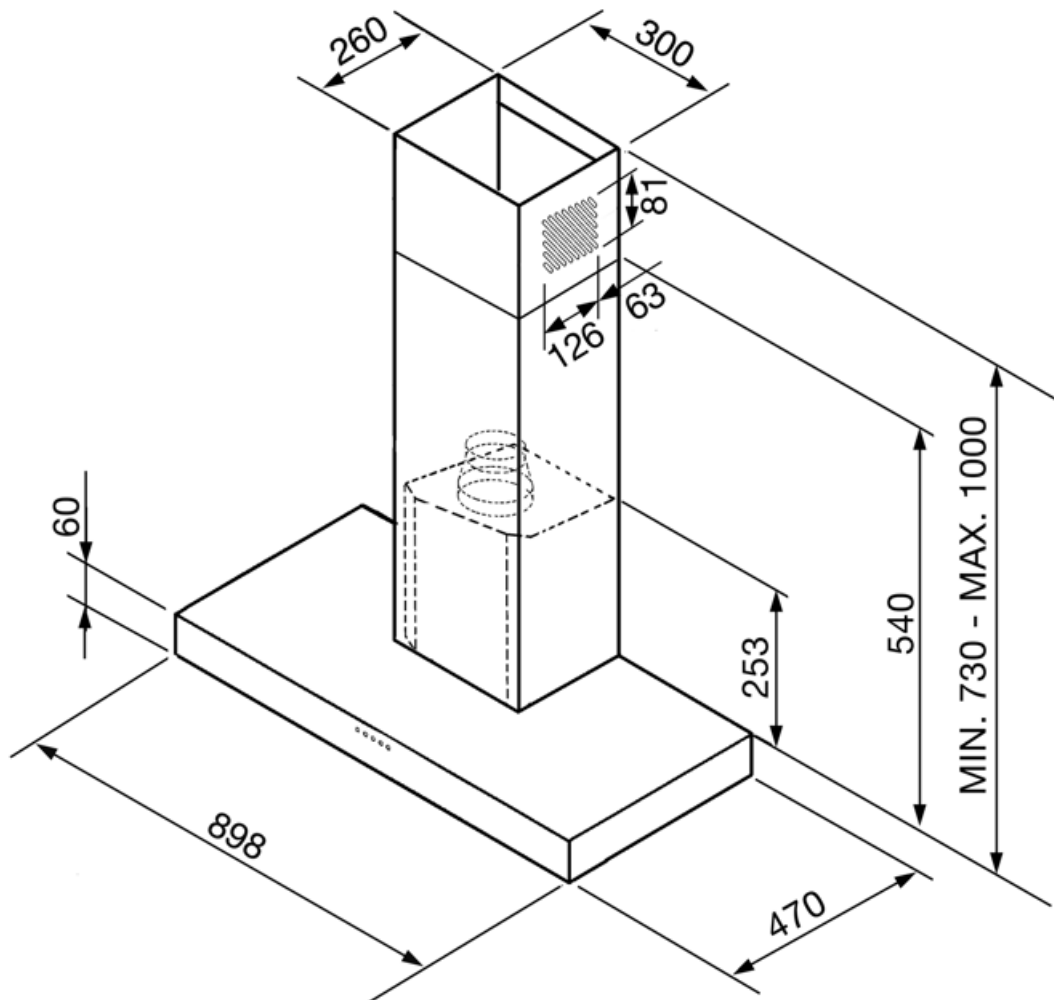

Compatible Accessories



KITALLFC










Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos



KITFC161

Kit de filtros de carvão 2 peças

Symbols glossary

	24h: Quando seleccionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível.		Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.
	Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.		Display LED: para mostrar os programas, funções e opções seleccionadas e o tempo até ao final do ciclo.
	Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.		Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.
	Controles táteis: O controles táteis, fáceis de usar, permitem que o aparelho seja programado com o toque de um botão.		Configuração intensiva/turbo: quando a extração extra rápida é necessária.
	Luzes de escurecimento	