

KS9500XE

Product family Hood

Hood Type Decorative wall hood

DesignT flatExtractionExtractionElectronic controlYes

MaterialStainless steelType of steelBrushed

EAN code 8017709201814

Hood width90 cmAestheticUniversaleColourStainless steel

Finishing Satin
Logo Embossed



150 mm

Yes

Controls

Control setting Electronic buttons

Program / Functions

No. of speeds Intensive speed

Time-setting options





Technical Features







No. of lights 2 No. of filters 3

Light typeLEDAnti-grease filtersAluminiumLight Power2 WFilter replacementYes

Light color temperature 4000 K indicator scale (K) Vent outlet

scale (K)

Free outlet maximum 800 m³/h

Non return valve

capacity Motor power 275 W

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	307	53
Speed 2	395	58



Speed 3	558	67
Intensive speed	759	73

Performance / Energy Label

Annual Efficiency 54 kWh/a Consumption (AEChood) Energy efficieency class A (EEC) Fluid Dynamic Efficiency 29.2 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 95.9 lux/W Lighting Efficiency Class A (LEC) **Grease Filtering** 78.9 % Efficiency (GFE) **Grease Filtering** Efficiency Class (GFEC) Air flow at minumum 307 m³/h speed (Qmin) Air flow at maximum 558 m³/h speed (Qmax) Air flow at boost speed 759 m³/h

Airbourne acouistical A- 53 dBA weighted sound Power Emission at minimum speed (SPEmin) Airborne acoustical A-67 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 73 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 0.9 Measured air flow rate 376 m³/h at best efficiency point (Qbep) Measured air pressure 449 Pa at best efficiency point (Pbep) Measured electric 160 W power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 211 lux the light on the cooking surface (Emiddle)

Electrical Connection

Electrical connection 278 W

rating

(Qboost)

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

Sound power level at

highest setting (Lwa)

length Plug 1000 mm

67 dBA

Not present

Also available

Alternative colours available


Black, Cream

Available colours

KS9500BLE - KS9500PE

Optional accessories



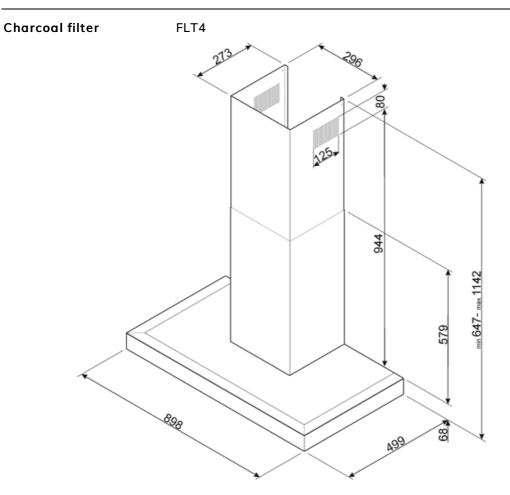



Compatible Accessories



FLT4
Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.