

KS9500XE

Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201814
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Logotipo	Logotipo embutido



Controls

Control setting	Electronic buttons
-----------------	--------------------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No

Technical Features



Hood without motor	No	Motor power	275 W
Remote motor	No	No. of filters	3
No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Charcoal filters included	No
Light Power	2 W	Filter replacement indicator	Yes
Dimmer mode	No	Vent outlet	150 mm
Escala de temperatura de cor clara (°K)	4000 °K	Non return valve	Yes
Free outlet maximum capacity	800 m³/h		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	307	53
Speed 2	395	58
Speed 3	558	67
Intensive speed	759	73

Accessories Included

Remote control	No	Tube reduction	No
----------------	----	----------------	----

Performance / Energy Label



Consumo anual de energía (CAE exaustor)	54 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	53 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	29,2	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	95,9 lux/W	Measured air flow rate at best efficiency point (Qbep)	376 m³/h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Pbep)	449 Pa
Grease Filtering Efficiency (GFE)	78,9 %	Measured electric power input at best efficiency point (Wbep)	160 W
Grease Filtering Efficiency Class (GFEC)	C	Nominal Power consumption of the light system (WL)	2 W
Air flow at minumum speed (Qmin)	307 m³/h	Average illumination of the light on the cooking surface (Emiddle)	211 lux
Air flow at maximum speed (Qmax)	558 m³/h	Sound power level at highest setting (Lwa)	67 dBA
Air flow at boost speed (Qboost)	759 m³/h		

Electrical Connection

Plug	No	Frequency (Hz)	50-60 Hz
------	----	----------------	----------

Electrical connection rating 278 W
Voltage 220-240 V

Comprimento do cabo de alimentação 1000 mm

Also available

Outras cores disponíveis Preta, Creme


Códigos das outras cores disponíveis

KS9500BLE - KS9500PE


Optional accessories

Charcoal filter FLT4
Remote control No
Chimney extension No
Vent outlet No

Non return valve No
Kit with aesthetic components No
Diffuser kit No

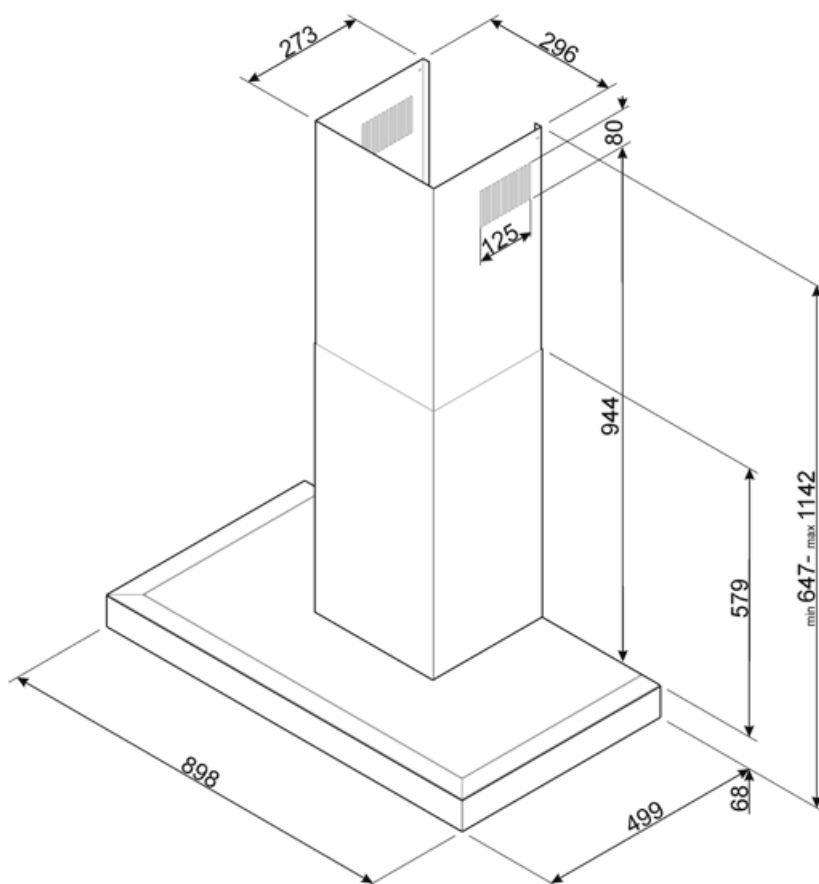

Compatible Accessories



FLT4

Filtro de carvão Kit 1 peça



KITALLFC

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos

Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.



R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos



Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.