

# KSCB90XE



Product family	Hood
Hood Type	Ceiling hood
Design	Ceiling
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709258108
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Silk screen



## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Program / Functions

No. of speeds	3
Intensive speed	

## Technical Features



No. of lights	4	No. of filters	2
Light type	LED	Anti-grease filters	Stainless steel
Light Power	1 W	Vent outlet	150 mm
Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	232	47
Speed 2	428	58
Speed 3	589	69

Intensive speed	792	72
-----------------	-----	----

## Accessories included

Remote control	Yes
----------------	-----

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	43 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	68 dBA
Fluid Dynamic Efficiency (FDE)	35.1	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.7
Lighting Efficiency (LE)	76.1 lux/W	Energy Efficiency Index	41.6
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	399 m³/h
Grease Filtering Efficiency (GFE)	54.1 %	Measured air pressure at best efficiency point (Pbep)	486 Pa
Grease Filtering Efficiency Class (GFEC)	F	Measured electric power input at best efficiency point (Wbep)	154 W
Air flow at minumum speed (Qmin)	232 m³/h	Nominal Power consumption of the light system (WL)	4 W
Air flow at maximum speed (Qmax)	589 m³/h	Average illumination of the light on the cooking surface (Emiddle)	353 lux
Air flow at boost speed (Qboost)	792 m³/h	Sound power level at highest setting (Lwa)	68 dBA

## Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	280 W	Power supply cable length	1500 mm
Voltage	220-240 V		


## Also available

Alternative colours  
available

White

Available colours

KSCB90WHE

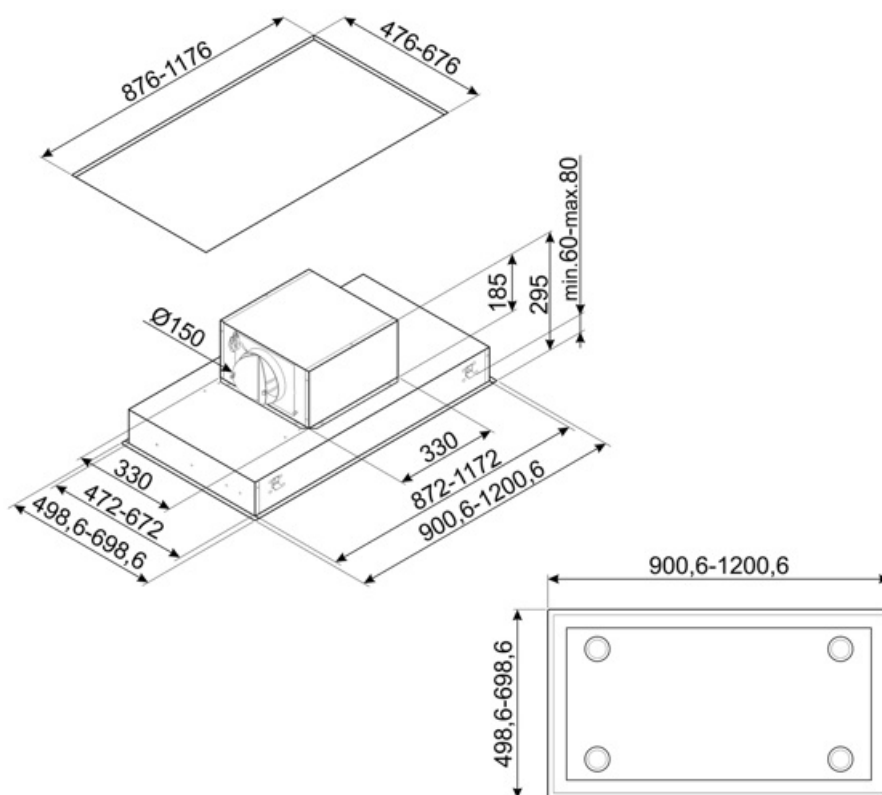

---

## Compatible Accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Intensive/turbo setting:** when extra fast extraction is required.



**A+: Energy efficiency class A+** helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



**Perimeter extraction panels:** very efficient and aid noise reduction.

---

## Benefit (TT)

---

### **Dimmering & Tunable lights**

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

### **Perimetral aspiration**

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture