


# KSCB94WH



Product family	Hood
Hood Type	Ceiling hood
Design	Ceiling
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709326173
Hood width	90 cm
Aesthetic	Universale
Colour	Matt White
Finishing	Satin
Logo	Silk screen

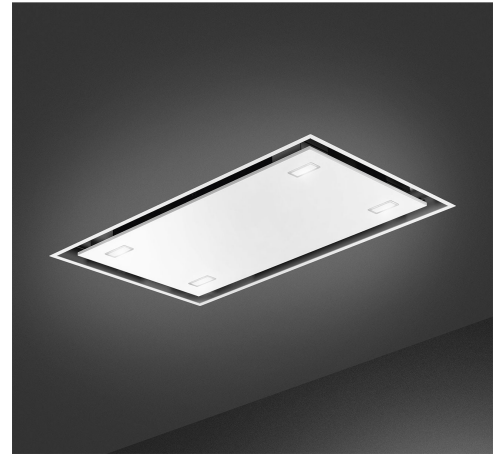

## Controls

Control setting	Touch control back-lighted White
-----------------	-------------------------------------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features



No. of lights	4	No. of filters	2
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2.3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature scale (K)	3000 K	Minimum distance from GAS hob	750 mm
Light color temperature range	2700 - 4000 K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	820 m <sup>3</sup> /h	Non return valve	Yes

Motor power 275 W

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	268	45
Speed 2	360	55
Speed 3	624	65
Intensive speed	798	70

## Accessories included

Remote control Yes

## Performance / Energy Label




Annual Efficiency Consumption (AEChood)	45 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	45 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dBA
Fluid Dynamic Efficiency (FDE)	35.3	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.7
Lighting Efficiency (LE)	26.6 lux/W	Energy Efficiency Index	43.8
Lighting Efficiency Class (LEC)	B	Measured air flow rate at best efficiency point (Qbep)	407 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	51.6 %	Measured air pressure at best efficiency point (Pbep)	472 Pa
Grease Filtering Efficiency Class (GFEC)	F	Measured electric power input at best efficiency point (Wbep)	151 W
Air flow at mininum speed (Qmin)	268 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	9 W
Air flow at maximum speed (Qmax)	624 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	245 lux
Air flow at boost speed (Qboost)	798 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	66 dBA

## Electrical Connection

Electrical connection rating	285 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

## Also available

Alternative colours available	Stainless steel	Available colours	KSCB94X
-------------------------------	-----------------	-------------------	---------

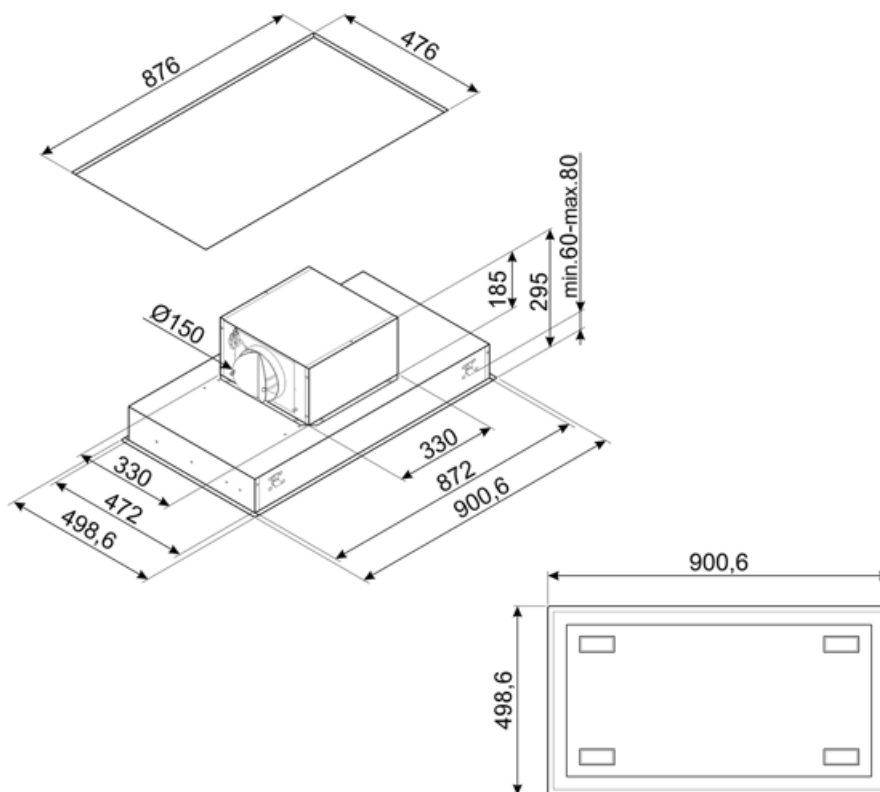

---

## Compatible Accessories

---

### FLT6












Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

- |                                                                                   |                                                                                                                                                           |                                                                                   |                                                                                                                                    |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
|   | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.                            |
|   | A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.            |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|   | Warning light(s): to advise when filters need changing.                                                                                                   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|   | Perimeter extraction panels: very efficient and aid noise reduction.                                                                                      |  | Intensive/turbo setting: when extra fast extraction is required.                                                                   |
|   | Connection between hob and hood                                                                                                                           |  | Dimmering Lights                                                                                                                   |
|  | Tunable white from warm to cold.                                                                                                                          |                                                                                   |                                                                                                                                    |