


# KSCB94WH





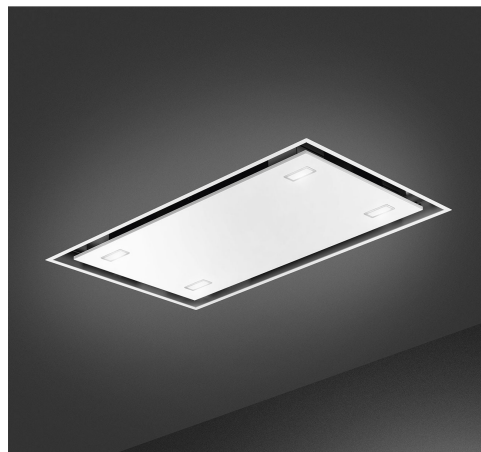

Product family	Hood
Hood Type	Ceiling hood
Design	Ceiling
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709326173
Aesthetic	Universale
Colour	Matt White
Finishing	Satin
Logo	Silk screen



## Controls

Control setting	Touch control back-lighted White
-----------------	-------------------------------------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features



No. of lights	4	No. of filters	2
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2.3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	750 mm
Light color temperature range	2700° - 4000° °K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	820 m³/h	Non return valve	Yes

Motor power 275 W

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	268	45
Speed 2	360	55
Speed 3	624	65
Intensive speed	798	70

## Accessories included

Remote control Yes

## Performance / Energy Label



**Annual Efficiency Consumption (AEChood)** 45 kWh/a  
**Energy efficiency class (EEC)** A+  
**Fluid Dynamic Efficiency (FDE)** 35,3  
**Fluid Dynamic Efficiency class (FDEC)** A  
**Lighting Efficiency (LE)** 26,6 lux/W  
**Lighting Efficiency Class (LEC)** B  
**Grease Filtering Efficiency (GFE)** 51,6 %  
**Grease Filtering Efficiency Class (GFEC)** F  
**Air flow at minumum speed (Qmin)** 268 m³/h  
**Air flow at maximum speed (Qmax)** 624 m³/h  
**Air flow at boost speed (Qboost)** 798 m³/h


**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 45 dBA  
**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 66 dBA  
**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)** 70 dBA  
**Time increase factor (F)** 0,7  
**Energy Efficiency Index** 43,8  
**Measured air flow rate at best efficiency point (Qbep)** 407 m³/h  
**Measured air pressure at best efficiency point (Pbep)** 472 Pa  
**Measured electric power input at best efficiency point (Wbep)** 151 W  
**Nominal Power consumption of the light system (WL)** 9 W  
**Average illumination of the light on the cooking surface (Emiddle)** 245 lux  
**Sound power level at highest setting (Lwa)** 66 dBA

## Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	285 W	Power supply cable length	1500 mm
Voltage	220-240 V		

## Also available

Alternative colours available	Stainless steel	Available colours	KSCB94X
-------------------------------	-----------------	-------------------	---------

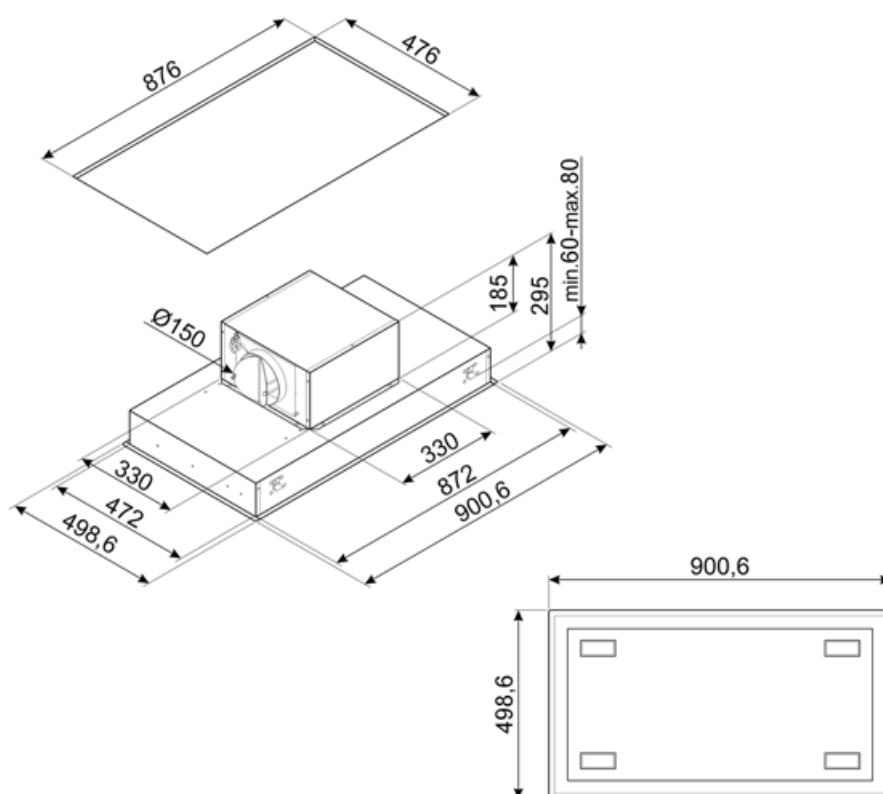

---

## Compatible Accessories

---



### FLT6












Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Perimeter extraction panels: very efficient and aid noise reduction.		Intensive/turbo setting: when extra fast extraction is required.
	Connection between hob and hood		Dimmering Lights
	Tunable white from warm to cold		

---

## Benefit (TT)

---

### **Dimmering & Tunable lights**

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

### **Perimetral aspiration**

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

### **Autovent 2.0**

Centralized and practical control via Bluetooth connection between hob and hood

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.