


# KSCB94WH





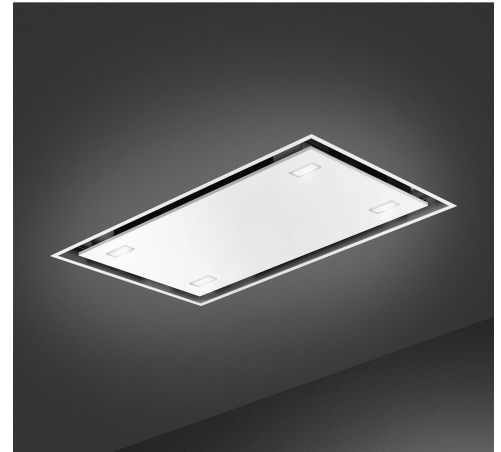

Product family	Hood
Hood Type	Ceiling hood
Design	Ceiling
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709326173
Aesthetic	Universale
Colour	Matt White
Finishing	Satin
Logo	Silk screen



## Controls

Control setting	Touch control back-lighted White
-----------------	-------------------------------------

## Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features



No. of lights	4	No. of filters	2
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2.3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature scale (°K)	3000 °K	Minimum distance from GAS hob	750 mm
Light color temperature range	2700° - 4000° °K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	820 m³/h	Non return valve	Yes

Motor power 275 W

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	268	45
Speed 2	360	55
Speed 3	624	65
Intensive speed	798	70

## Accessories Included

Remote control Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	45 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dBA
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency (FDE)	35,3	Power consumption in stand-by mode (Ps)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	26,6 lux/W	Energy Efficiency Index	43,8
Lighting Efficiency Class (LEC)	B	Measured air flow rate at best efficiency point (Qbep)	407 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	51,6 %	Measured air pressure at best efficiency point (Pbep)	472 Pa
Grease Filtering Efficiency Class (GFEC)	F	Measured electric power input at best efficiency point (Wbep)	151 W
Air flow at minumum speed (Qmin)	268 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	9 W
Air flow at maximum speed (Qmax)	624 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	245 lux
Air flow at boost speed (Qboost)	798 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	66 dBA
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	45 dBA		

## Electrical Connection

Plug Not present Frequency (Hz) 50-60 Hz


---

Electrical connection rating	285 W	Power supply cable length	1500 mm
Voltage	220-240 V		

## Also available

---

Alternative colours available	Stainless steel	Available colours	KSCB94X
-------------------------------	-----------------	-------------------	---------

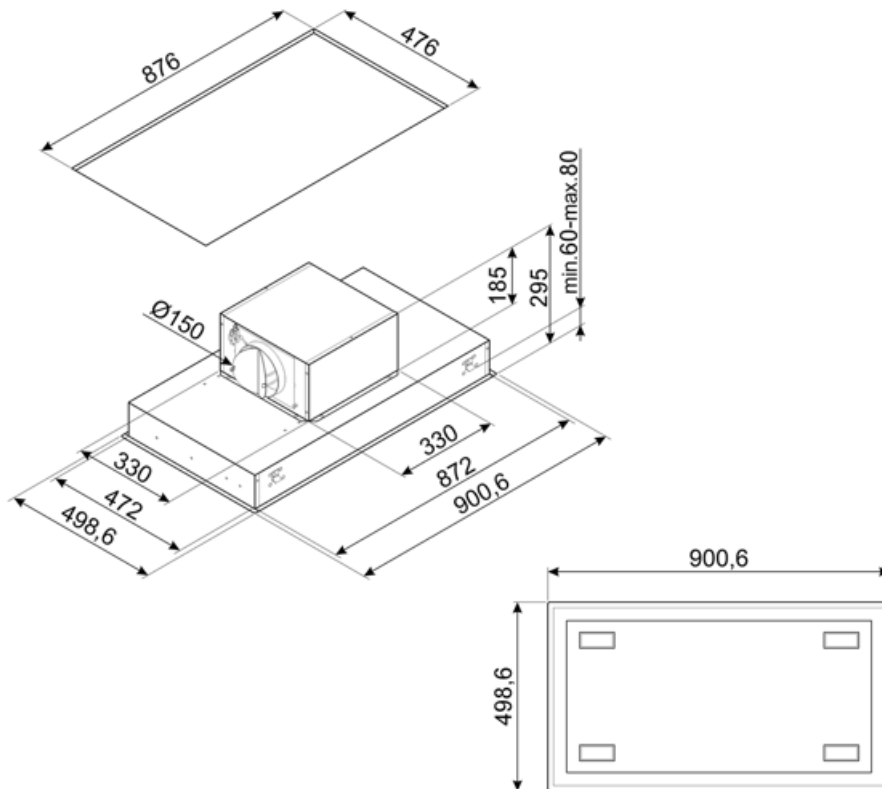

---

## Compatible Accessories

---



### FLT6












Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

- |  |   |   |  |
|--|---|---|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed. |
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.   |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.             |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                                  |
|  | Perimeter extraction panels: very efficient and aid noise reduction.  |  | Intensive/turbo setting: when extra fast extraction is required.   |
|  | Connection between hob and hood   |  | Dimmering Lights   |
|  | Tunable white from warm to cold   |   |  |

## Benefit (TT)

---

### **Perimetral aspiration**

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Dimmering & Tunable lights**

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

### **Autovent 2.0**

Centralized and practical control via Bluetooth connection between hob and hood

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.