

KSCB94X



Product family Hood Ceiling hood **Hood Type** Design Ceiling Extraction Extraction **Electronic control** Yes

Perimeter extraction Yes

Material Stainless steel Type of steel Brushed

EAN code 8017709326180

Hood width 90 cm **Aesthetic** Universale Colour Stainless steel

Finishing Satin Silk screen Logo



Controls

Control setting Touch control back-lighted

White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-vent 2.0









Technical Features











No. of lights Light type **LED Light Power** 2,3 W Dimmer mode

scale (K)

Light color temperature

Light color temperature

range

Free outlet maximum capacity

2700 - 4000 K

820 m³/h

3000 K

No. of filters

Anti-grease filters

Filter replacement indicator

Vent outlet Minimum distance from

GAS hob

Minimum distance from

ELECTRIC hob

650 mm

150 mm

750 mm

Stainless steel

Non return valve

Yes

Yes



Motor power

275 W

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	268	45
Speed 2	360	55
Speed 3	624	65
Intensive speed	798	70

Accessories included

Remote control

Yes

Performance / Energy Label

_		tr
	A*	7

Annual Efficiency 45 kWh/a Consumption (AEChood) Energy efficieency class A+ (EEC) Fluid Dynamic Efficiency 35,3 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 26,6 lux/W Lighting Efficiency Class B (LEC) **Grease Filtering** 51,6 % Efficiency (GFE) **Grease Filtering** Efficiency Class (GFEC) Air flow at minumum 268 m³/h speed (Qmin) Air flow at maximum 624 m³/h speed (Qmax) Air flow at boost speed 798 m³/h (Qboost)

Airbourne acouistical A- 45 dBA weighted sound Power Emission at minimum speed (SPEmin) Airborne acoustical A-66 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 70 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) 0,7 **Energy Efficiency Index** 43.8 Measured air flow rate 407 m³/h at best efficiency point (Qbep) Measured air pressure 472 Pa at best efficiency point (Pbep) Measured electric 151 W power input at best efficiency point (Wbep) **Nominal Power** 9 W consumption of the light system (WL) Average illumination of 245 lux the light on the cooking surface (Emiddle) Sound power level at 66 dBA

highest setting (Lwa)

Electrical Connection



Electrical connection

285 W

Power supply cable length

1500 mm

rating

Voltage 220-240 V

Frequency (Hz) 50-60 Hz

Plug Not present


Also available

Alternative colours available

White

Available colours

KSCB94WH

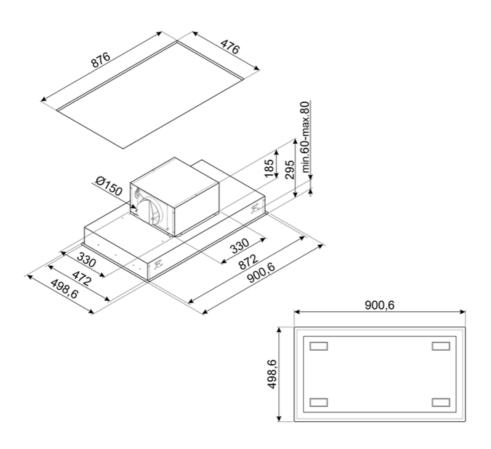



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



Dimmering Lights



Tunable white from warm to cold