


KSCB94X





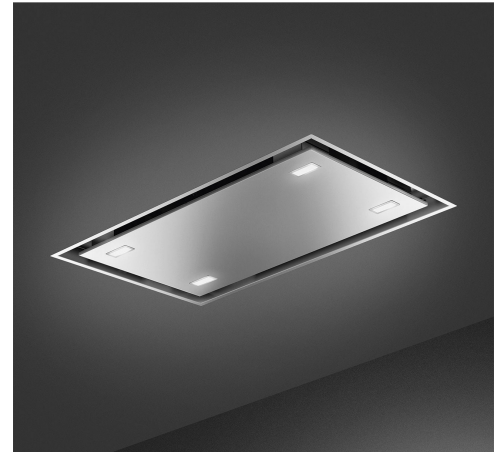

Product family	Hood
Tipo de Exaustor	Ceiling hood
Design	Ceiling
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709326180
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Logotipo	Logotipo serigrafado



Controls

Control setting	Controle de toque retroiluminado Branco
-----------------	--------------------------------------------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No
Ventilação automática 2.0	

Technical Features



Hood without motor	No	Motor power	275 W
Remote motor	No	No. of filters	2
No. of lights	4	Anti-grease filters	Stainless steel
Light type	LED	Charcoal filters included	No
Light Power	2.3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm

Escala de temperatura de cor clara (°K)	3000 °K	Minimum distance from GAS hob	750 mm
Faixa de temperatura de cor clara	2700° - 4000° °K	Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	820 m³/h	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	268	45
Speed 2	360	55
Speed 3	624	65
Intensive speed	798	70

Accessories Included

Remote control	Yes	Tube reduction	No
Sliding door	No		

Performance / Energy Label



Consumo anual de energia (CAE exaustor)	45 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dBA
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency (FDE)	35,3	Power consumption in stand-by mode (Ps)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	26,6 lux/W	Energy Efficiency Index	43,8
Lighting Efficiency Class (LEC)	B	Measured air flow rate at best efficiency point (Qbep)	407 m³/h
Grease Filtering Efficiency (GFE)	51,6 %	Measured air pressure at best efficiency point (Pbep)	472 Pa
Grease Filtering Efficiency Class (GFEC)	F	Measured electric power input at best efficiency point (Wbep)	151 W
Air flow at minumum speed (Qmin)	268 m³/h	Nominal Power consumption of the light system (WL)	9 W
Air flow at maximum speed (Qmax)	624 m³/h	Average illumination of the light on the cooking surface (Emiddle)	245 lux
Air flow at boost speed (Qboost)	798 m³/h	Sound power level at highest setting (Lwa)	66 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	45 dBA		

Electrical Connection


Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	285 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

Also available

Outras cores disponíveis Branca

Códigos das outras cores disponíveis

KSCB94WH

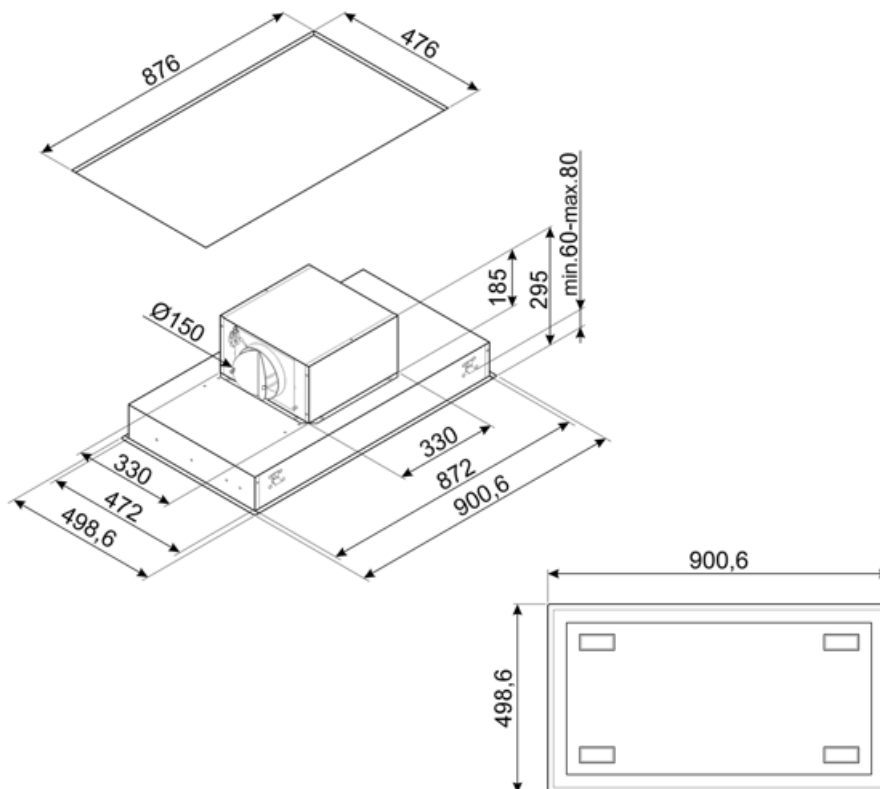

Compatible Accessories

FLT6

Filtros de carvão redondos (kit 2 peças)














KITALLFC

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos



Symbols glossary

- | | | | |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 24h: Quando selecionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível. |  | Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento. |
|  | Ligação entre a placa e o exaustor |  | Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente. |
|  | A+: A classe de eficiência energética A+ ajuda a economizar até 10% de energia em comparação com a classe A. O desempenho máximo com consumo mínimo é garantido. |  | Luzes de escurecimento |
|  | Luz(s) de aviso: para avisar quando os filtros precisam ser trocados. |  | Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha. |
|  | Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído. |  | Configuração intensiva/turbo: quando a extração extra rápida é necessária. |
|  | Branco sintonizável do quente ao frio | | |

Benefit (TT)

Perimetral aspiration

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

Dimmering & Tunable lights

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

Touch display back lighted white

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

Autovent 2.0

Centralized and practical control via Bluetooth connection between hob and hood

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.