

# KSDD90VN-2



Product family	Hood
Hood Type	DownDraft
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709239336
Hood width	90 cm
Aesthetic	Dolce Stil Novo
Colour	Black
Finishing	Glass
Glass Type	Black
Serigraphy colour	White
Logo	Silk screen



## Controls

Control setting	Remote Control
-----------------	----------------

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features



Remote motor	Included	Motor power	285 W
No. of lights	1	No. of filters	2
Light type	LED	Anti-grease filters	stainless steel 7 layer
Light Power	6 W	Vent outlet	150 mm
Light color temperature scale (K)	4000 K	Non return valve	Yes
Free outlet maximum capacity	800 m <sup>3</sup> /h		

Extraction rate IEC 61591 [m <sup>3</sup> /h]
---

Noise level IEC 60704-2-13 [dBA]
----------------------------------

Speed 1	230	42
Speed 2	322	50
Speed 3	500	59
Intensive speed	730	66

## Accessories included

Remote control	Yes	Motorised opening	Yes
----------------	-----	-------------------	-----


## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	60 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	40 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	57 dBA
Fluid Dynamic Efficiency (FDE)	29,5	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	65 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1,00
Lighting Efficiency (LE)	15,0 lux/W	Energy Efficiency Index	53,1
Lighting Efficiency Class (LEC)	D	Measured air flow rate at best efficiency point (Qbep)	349 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	38,9 %	Measured air pressure at best efficiency point (Pbep)	464 Pa
Grease Filtering Efficiency Class (GFEC)	G	Measured electric power input at best efficiency point (Wbep)	147 W
Air flow at mininum speed (Qmin)	213 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	6 W
Air flow at maximum speed (Qmax)	448 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	253 lux
Air flow at boost speed (Qboost)	724 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	57 dBA

## Electrical Connection

Electrical connection rating	292 W	Power supply cable length	1000 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

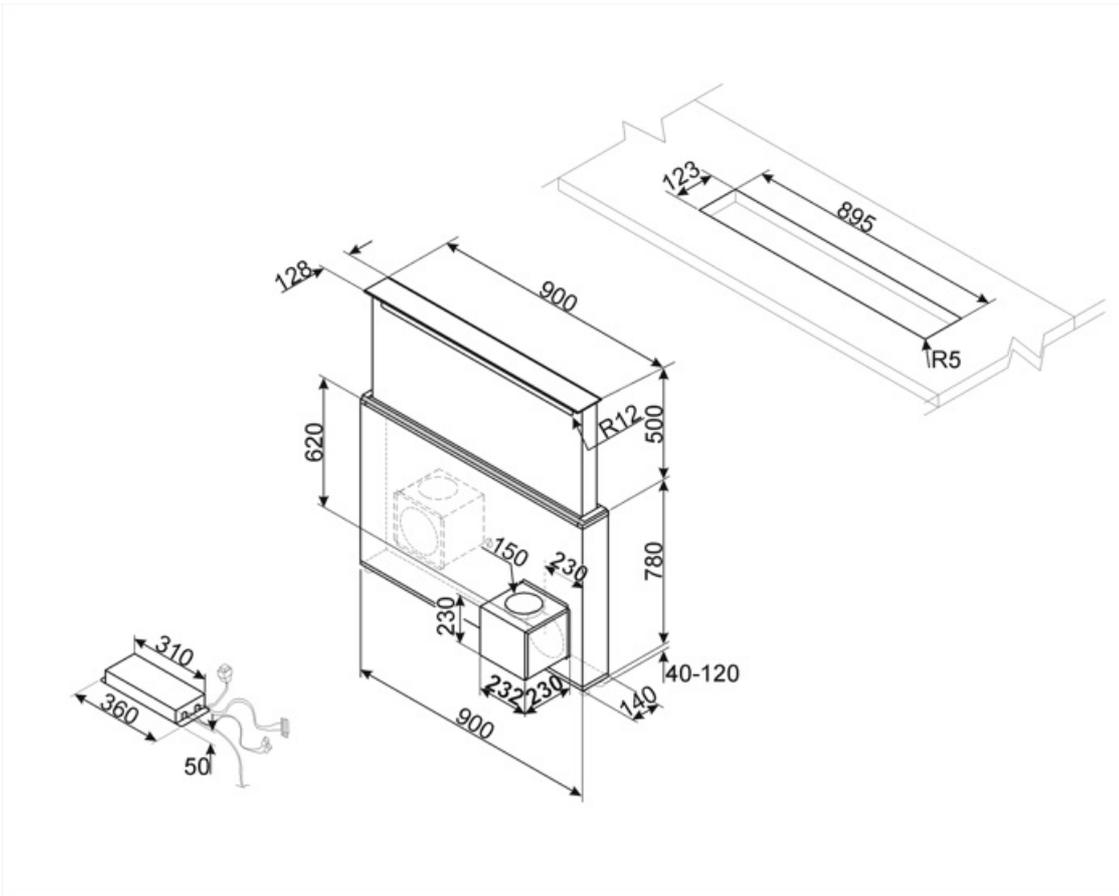

---

## Symbols glossary

---

- |  |   |   |  |
|--|---|---|--|
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Energy efficiency class A   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|  | Perimeter extraction panels: very efficient and aid noise reduction.                                    |  | Intensive/turbo setting: when extra fast extraction is required.   |