


KSDD90VN-2



Product family	Hood
Hood Type	DownDraft
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709239336
Hood width	90 cm

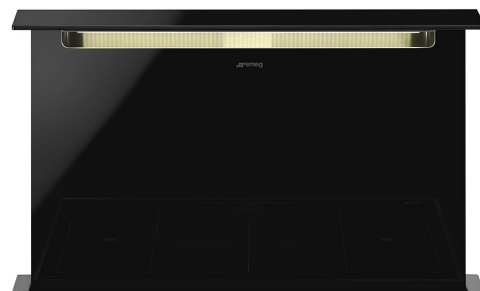

Aesthetics

Aesthetic	Dolce Stil Novo	Glass Type	Black
Colour	Black	Serigraphy colour	White
Finishing	Glass	Logo	Silk screen

Controls

Control setting	Remote Control
-----------------	----------------

Programs / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features



Remote motor	Included	Motor power	285 W
No. of lights	1	No. of filters	2
Light type	LED	Anti-grease filters	stainless steel 7 layer
Light Power	6 W	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Non return valve	Yes

Free outlet maximum capacity 800 m³/h

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	230	42
Speed 2	322	50
Speed 3	500	59
Intensive speed	730	66

Accessories Included

Remote control Yes Motorised opening Yes

Performance / Energy Label

A

Annual Efficiency Consumption (AEChood) 60 kWh/a
 Energy efficiency class (EEC) A
 Fluid Dynamic Efficiency (FDE) 29,5
 Fluid Dynamic Efficiency class (FDEC) A
 Lighting Efficiency (LE) 15,0 lux/W
 Lighting Efficiency Class (LEC) D
 Grease Filtering Efficiency (GFE) 38,9 %
 Grease Filtering Efficiency Class (GFEC) G
 Air flow at minumum speed (Qmin) 213 m³/h
 Air flow at maximum speed (Qmax) 448 m³/h
 Air flow at boost speed (Qboost) 724 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 40 dB(A)
 Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 57 dB(A)
 Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 65 dB(A)
 Time increase factor (F) 1,00
 Energy Efficiency Index 53,1
 Measured air flow rate at best efficiency point (Qbep) 349 m³/h
 Measured air pressure at best efficiency point (Pbep) 464 Pa
 Measured electric power input at best efficiency point (Wbep) 147 W
 Nominal Power consumption of the light system (WL) 6 W
 Average illumination of the light on the cooking surface (Emiddle) 253 lux
 Sound power level at highest setting (Lwa) 57 dB(A)


Electrical Connection

Electrical connection rating
Voltage

292 W
220-240 V

Frequency (Hz)
Power supply cable length

50-60 Hz
1000 mm

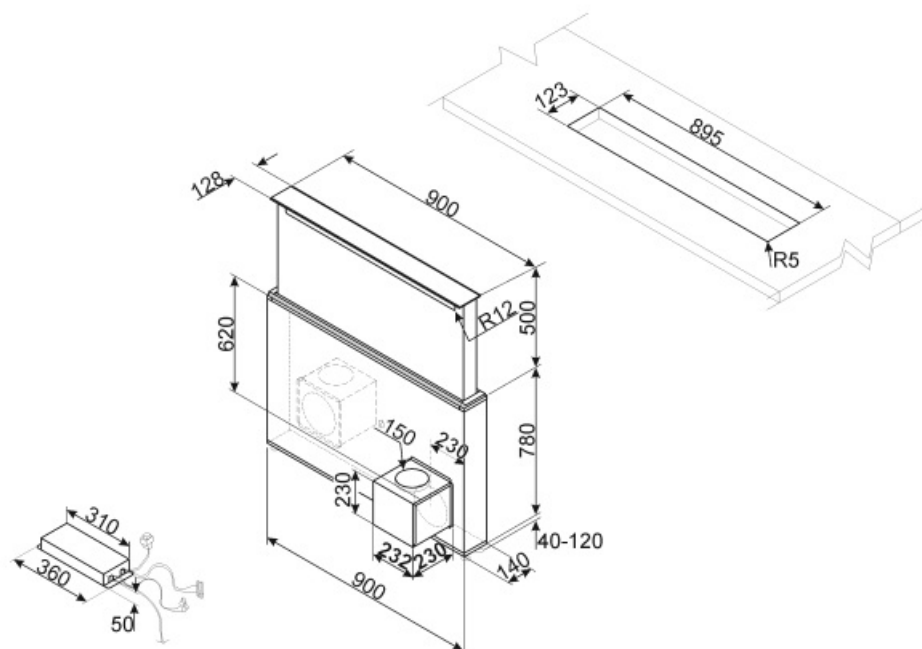

Not included accessories




KITKDSNBG

HOOD FRAME BLACK GLASS AND SS.
FLUSH INSTALLATION KSDD90VN-2



KITKDSNX

HOOD FRAME BLACK GLASS WITH
STAINLESS STEEL PROFILE FLAT
INSTALLATION KSDD90VN-2



FLTDSN90

Charcoal filter Kit 2 pieces
(20x460x190 mm)

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Perimeter extraction panels: very efficient and aid noise reduction.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.