

# KSEC61BE3

Product family Hood

Hood Type Integrated (semi) hood
Design Visible front panel

**Extraction** Extraction

MaterialPainted materialEAN code8017709343316

AestheticUniversaleColourWhiteSerigraphy colourBlackLogoSilk screen



#### **Controls**

Control setting Slider

## **Program / Functions**

No. of speeds 3

### **Technical Features**







No. of lights 2 No. of filters 1

Light type LED Anti-grease filters Metallic multilayer

Light Power 4 W Charcoal filters included Yes
Light color temperature 4000 °K Vent outlet 120 mm scale (°K) Minimum distance from 650 mm

Free outlet maximum 315 m³/h GAS hob

capacity Minimum distance from 450 mm

Motor power 115 W ELECTRIC hob

|            | Extraction rate IEC<br>61591 [m³/h] | Noise level IEC 60704-2-<br>13 [dBA] |
|------------|-------------------------------------|--------------------------------------|
| Speed<br>1 | 170                                 | 58                                   |
| Speed<br>2 | 240                                 | 66                                   |



| Speed<br>3 | 305 | 72 |
|------------|-----|----|
|------------|-----|----|

### Performance / Energy Label

**Annual Efficiency** 60 kWh/a Consumption (AEChood) Energy efficieency class C (EEC) Fluid Dynamic Efficiency 10 (FDE) Fluid Dynamic Efficiency E class (FDEC) Lighting Efficiency (LE) 11 lux/W Lighting Efficiency Class E (LEC) at best efficiency point **Grease Filtering** 40 % (Qbep)

Efficiency (GFE) **Grease Filtering** G **Efficiency Class (GFEC)** 

Air flow at minumum 170 m<sup>3</sup>/h

speed (Qmin)

Air flow at maximum 305 m<sup>3</sup>/h speed (Qmax)

Airbourne acouistical A- 58 dBA weighted sound Power

**Emission at minimum** speed (SPEmin)

Airborne acoustical A-72 dBA weighted sound Power

**Emission at maximum** speed (SPEmax)

Time increase factor (F) 1,6 **Energy Efficiency Index** 84,8 Measured air flow rate 167 m<sup>3</sup>/h

Measured air pressure 198 Pa at best efficiency point

(Pbep)

Measured electric 92 W power input at best

efficiency point (Wbep) **Nominal Power** 

consumption of the light system (WL)

Average illumination of the light on the cooking

surface (Emiddle)

Sound power level at highest setting (Lwa)

90 lux

8 W

72 dBA

### **Electrical Connection**

Plug Not present **Electrical connection** 133 W

rating

220-240 V Voltage

Frequency (Hz) Power supply cable

length

50-60 Hz 1500 mm

#### Also available

Alternative colours availible

Black, Stainless steel

**Available colours** 


KSEC61NE3 - KSEC61XE3

## Optional accessories

Charcoal filter

Yes



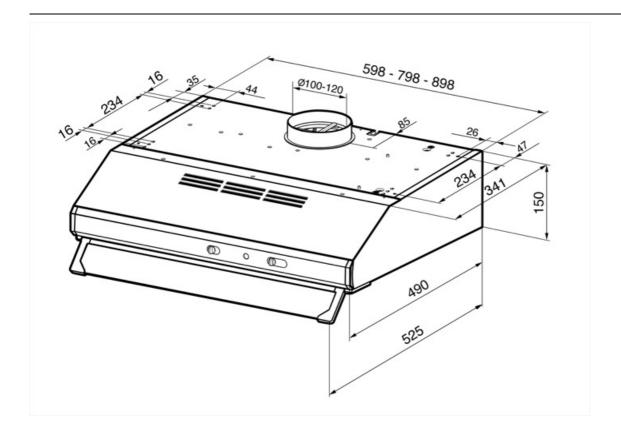



# **Compatible Accessories**



KITFC111 Charcoal filters round Kit 1 piece



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

