

# KSEC61BE3

**Product family** Hood

**Hood Type** Integrated (semi) hood Design Visible front panel

Extraction Extraction

Material Painted material EAN code 8017709343316

Hood width 60 cm **Aesthetic** Universale Colour White Serigraphy colour Black Logo Silk screen



#### **Controls**

Control setting Slider

## **Program / Functions**


No. of speeds 3

#### **Technical Features**









No. of filters

LED Light type Anti-grease filters Metallic multilayer **Light Power** 4 W Charcoal filters included Yes

Light color temperature 4000 K Vent outlet 120 mm

scale (K) Minimum distance from 650 mm

Free outlet maximum 315 m<sup>3</sup>/h **GAS** hob

capacity Minimum distance from 450 mm

Motor power 115 W **ELECTRIC hob** 

|            | Extraction rate IEC<br>61591 [m³/h] | Noise level IEC 60704-2-<br>13 [dBA] |
|------------|-------------------------------------|--------------------------------------|
| Speed<br>1 | 170                                 | 58                                   |
| Speed<br>2 | 240                                 | 66                                   |

**SMEG SPA** 12/12/2025



| Speed<br>3 | 305 | 72 |
|------------|-----|----|
|------------|-----|----|

### Performance / Energy Label

**Annual Efficiency** 60 kWh/a Airbourne acouistical A- 58 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class C speed (SPEmin) (EEC) Airborne acoustical A-72 dBA Fluid Dynamic Efficiency 10 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency E speed (SPEmax) class (FDEC)

Time increase factor (F) 1,6 Lighting Efficiency (LE) 11 lux/W **Energy Efficiency Index** 84,8 Lighting Efficiency Class E Measured air flow rate 167 m<sup>3</sup>/h (LEC) at best efficiency point **Grease Filtering** 40 %

(Qbep) Efficiency (GFE) Measured air pressure 198 Pa **Grease Filtering** G at best efficiency point **Efficiency Class (GFEC)** 

(Pbep) Air flow at minumum 170 m<sup>3</sup>/h Measured electric 92 W speed (Qmin) power input at best

Air flow at maximum 305 m<sup>3</sup>/h efficiency point (Wbep) speed (Qmax) **Nominal Power** 8 W

consumption of the light system (WL)

the light on the cooking surface (Emiddle)

Sound power level at 72 dBA highest setting (Lwa)

90 lux

Average illumination of

#### **Electrical Connection**

**Electrical connection** 133 W Power supply cable 1500 mm

length rating

220-240 V Plug Voltage Not present Frequency (Hz) 50-60 Hz

#### Also available

available


Black, Stainless steel **Available colours** Alternative colours KSEC61NE3 - KSEC61XE3

### Optional accessories

Charcoal filter Yes

**SMEG SPA** 12/12/2025



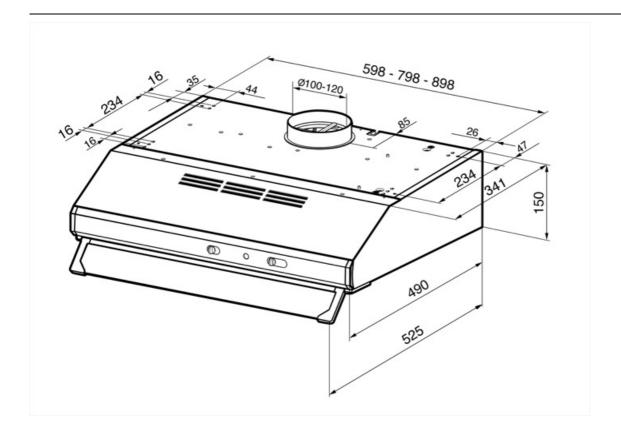

SMEG SPA 12/12/2025



## **Compatible Accessories**



KITFC111 Charcoal filters round Kit 1 piece

SMEG SPA 12/12/2025



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

C | A ---

SMEG SPA 12/12/2025