

# KSEC61NE3

|                   |                        |
|-------------------|------------------------|
| Product family    | Hood                   |
| Hood Type         | Integrated (semi) hood |
| Design            | Visible front panel    |
| Extraction        | Extraction             |
| Material          | Painted material       |
| EAN code          | 8017709343323          |
| Hood width        | 60 cm                  |
| Aesthetic         | Universale             |
| Colour            | Black                  |
| Serigraphy colour | Black                  |
| Logo              | Silk screen            |



## Controls

|                 |        |
|-----------------|--------|
| Control setting | Slider |
|-----------------|--------|

## Program / Functions

|               |   |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

## Technical Features



|  |                       |   |                     |
|--|-----------------------|---|---------------------|
| <b>No. of lights</b>                     | 2                     | <b>No. of filters</b>                     | 1                   |
| <b>Light type</b>                        | LED                   | <b>Anti-grease filters</b>                | Metallic multilayer |
| <b>Light Power</b>                       | 4 W                   | <b>Charcoal filters included</b>          | Yes                 |
| <b>Light color temperature scale (K)</b> | 4000 K                | <b>Vent outlet</b>                        | 120 mm              |
| <b>Free outlet maximum capacity</b>      | 315 m <sup>3</sup> /h | <b>Minimum distance from GAS hob</b>      | 650 mm              |
| <b>Motor power</b>                       | 115 W                 | <b>Minimum distance from ELECTRIC hob</b> | 450 mm              |

|         | Extraction rate IEC 61591 [m <sup>3</sup> /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 170   | 58                               |
| Speed 2 | 240   | 66                               |

|            |     |    |
|------------|-----|----|
| Speed<br>3 | 305 | 72 |
|------------|-----|----|

## Performance / Energy Label




|  |                       |  |                       |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood)  | 60 kWh/a              | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 58 dBA                |
| Energy efficiency class (EEC)            | C                     | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 72 dBA                |
| Fluid Dynamic Efficiency (FDE)           | 10                    | Time increase factor (F)   | 1.6                   |
| Fluid Dynamic Efficiency class (FDEC)    | E                     | Energy Efficiency Index  | 84.8                  |
| Lighting Efficiency (LE)                 | 11 lux/W              | Measured air flow rate at best efficiency point (Qbep)                         | 167 m <sup>3</sup> /h |
| Lighting Efficiency Class (LEC)          | E                     | Measured air pressure at best efficiency point (Pbep)                          | 198 Pa                |
| Grease Filtering Efficiency (GFE)        | 40 %                  | Measured electric power input at best efficiency point (Wbep)                  | 92 W                  |
| Grease Filtering Efficiency Class (GFEC) | G                     | Nominal Power consumption of the light system (WL)                             | 8 W                   |
| Air flow at minumum speed (Qmin)         | 170 m <sup>3</sup> /h | Average illumination of the light on the cooking surface (Emiddle)             | 90 lux                |
| Air flow at maximum speed (Qmax)         | 305 m <sup>3</sup> /h | Sound power level at highest setting (Lwa)                                     | 72 dBA                |

## Electrical Connection

|                              |           |                           |             |
|------------------------------|-----------|---------------------------|-------------|
| Electrical connection rating | 133 W     | Power supply cable length | 1500 mm     |
| Voltage                      | 220-240 V | Plug                      | Not present |
| Frequency (Hz)               | 50-60 Hz  |                           |             |

## Also available

|                               |                        |                   |                       |
|-------------------------------|------------------------|-------------------|-----------------------|
| Alternative colours available | White, Stainless steel | Available colours | KSEC61BE3 - KSEC61XE3 |
|-------------------------------|------------------------|-------------------|-----------------------|

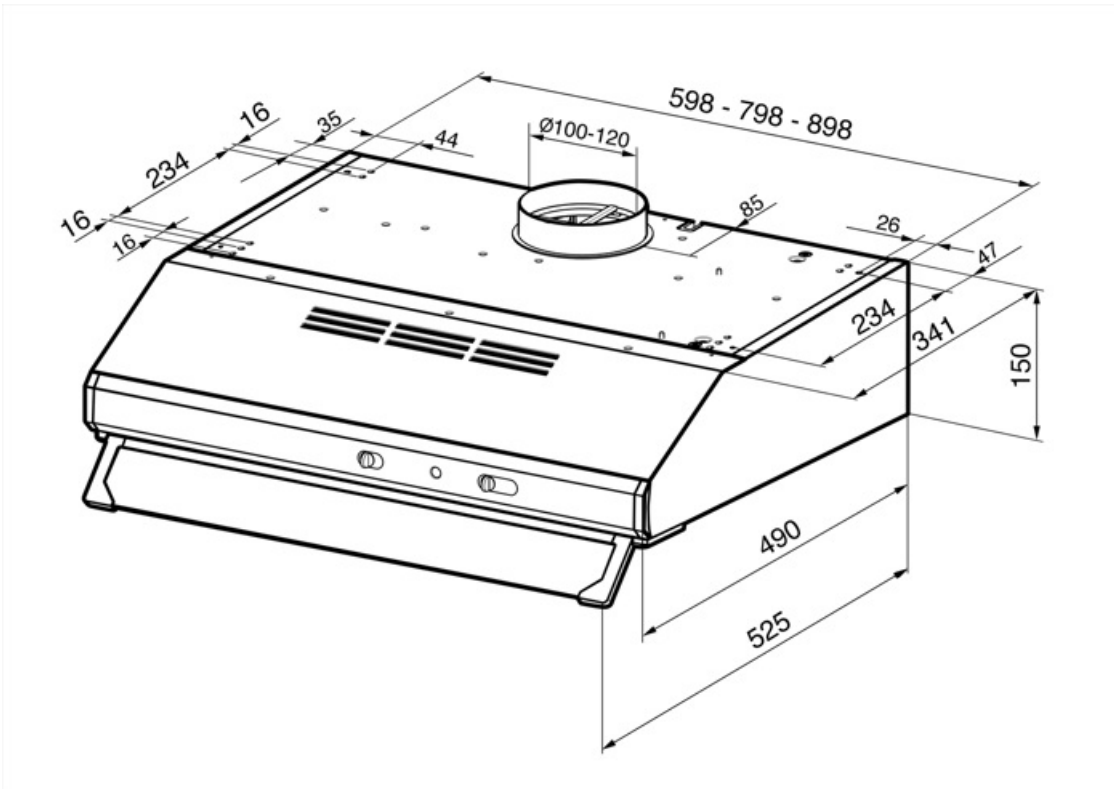

---

## Compatible Accessories

---



**KITFC111**

Charcoal filters round Kit 1 piece

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Charcoal filters:** Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.