

# KSEC81XE3

## Product family

Hood Type	Hood
Design	Integrated (semi) hood
Extraction	Visible front panel
Material	Extraction
EAN code	Stainless Steel + Painted Material
Hood width	8017709343347
Aesthetic	80 cm
Colour	Universale
Serigraphy colour	Stainless steel/Black
Logo	Black
	Silk screen




## Controls

Control setting	Slider
-----------------	--------

## Program / Functions

No. of speeds	3
---------------	---

## Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Metallic multilayer
Light Power	4 W	Charcoal filters included	Yes
Light color temperature scale (K)	4000 K	Vent outlet	120 mm
Free outlet maximum capacity	315 m³/h	Minimum distance from GAS hob	650 mm
Motor power	115 W	Minimum distance from ELECTRIC hob	450 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	170	58
Speed 2	240	66


Speed 3	305	72
---------	-----	----

## Performance / Energy Label

 <b>CE</b>	
<b>Annual Efficiency Consumption (AEChood)</b>	60 kWh/a
<b>Energy efficiency class (EEC)</b>	C
<b>Fluid Dynamic Efficiency (FDE)</b>	10
<b>Fluid Dynamic Efficiency class (FDEC)</b>	E
<b>Lighting Efficiency (LE)</b>	11 lux/W
<b>Lighting Efficiency Class (LEC)</b>	E
<b>Grease Filtering Efficiency (GFE)</b>	40 %
<b>Grease Filtering Efficiency Class (GFEC)</b>	G
<b>Air flow at minimum speed (Qmin)</b>	170 m <sup>3</sup> /h
<b>Air flow at maximum speed (Qmax)</b>	305 m <sup>3</sup> /h
<b>Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)</b>	Airbourne acoustical A- 58 dBA
<b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>	Airborne acoustical A- 72 dBA
<b>Time increase factor (F)</b>	1.6
<b>Energy Efficiency Index</b>	84.8
<b>Measured air flow rate at best efficiency point (Qbep)</b>	167 m <sup>3</sup> /h
<b>Measured air pressure at best efficiency point (Pbep)</b>	198 Pa
<b>Measured electric power input at best efficiency point (Wbep)</b>	92 W
<b>Nominal Power consumption of the light system (WL)</b>	8 W
<b>Average illumination of the light on the cooking surface (Emiddle)</b>	90 lux
<b>Sound power level at highest setting (Lwa)</b>	72 dBA

## Electrical Connection

<b>Electrical connection rating</b>	133 W	<b>Power supply cable length</b>	1500 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	Not present
<b>Frequency (Hz)</b>	50 Hz		

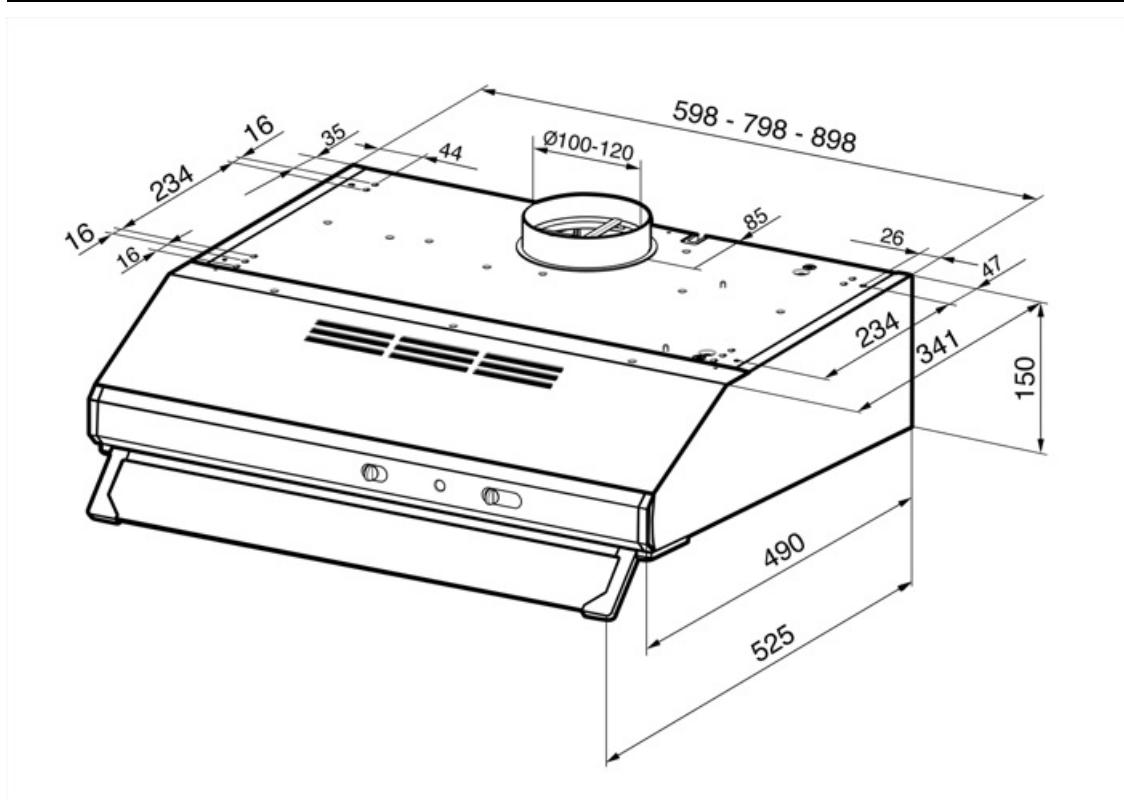



---

## Compatible Accessories

---



**KITFC111**

Charcoal filters round Kit 1 piece

## Symbols glossary



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Charcoal filters:** Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

